

EXPORT SINCE 2005
ONE STOP PURCHASING

2019-2022

NAILS & STEEL CATALOGUE



Shandong Lala Metal Products Co.,Ltd

Add: Rm1206,2A# Bei Cheng Ming Ju Yimeng North Road,
Linyi City, Shandong Province, China

Tel: +86-539-7977831 Fax: +86-539-7977830
Wechat: +8618953955575 Whatsapp: +8613705495251
Email: chunlei@sinogrp.com Http: www.sinogrp.com

www.sinogrp.com



• 办公室 OFFICE



• 迪拜BIG5 展会 DUBAI BIG 5 EXHIBITION



• 钉子车间 NAILS WORKSHOP



• 热镀锌卷生产线
HOT DIPPED GALVANIZED COIL PRODUCTION LINE



Shandong Lala Metal Products Co., Ltd. is one of the leading fasteners and steel products exporter in china, is well-known in the industry with many years of export experience. Our main products: common nails, roofing nails, concrete nails, corrugated roofing sheet, PPGI coils, GI coils, square hollow tube, round pipe, cold rolled steel sheet ,wire,wire mesh and all kinds of agricultural tools. We are located in Linyi city, Shandong Province, with convenient transportation access. Dedicated to strict quality control and thoughtful customer service, we insist quality first and fast delivery, our experienced staff members are always available to discuss your requirements and ensure full customer satisfaction. We also welcome OEM and ODM orders. Whether selecting a current product from our catalog or seeking engineering assistance for your application, you can talk to our customer service center about your sourcing requirements

Our experienced sales team serving more than 120 bigger customers in more than 40 countries. Africa is our main market, the main exporting countries are Nigeria, Benin, Haiti, Ghana, Sierra Leone, Burkina Faso, Chad, Madagascar, Ethiopia, Tanzania and Kenya. We have a large number of trusted and long-term cooperative customer partners. we are willing to provide Chinese high-quality goods and services for more friends all over the world. We firmly believe that honesty, trustworthiness and win-win will make our cooperation develop for a long time.

Our sister company:
Sino Union Industrial Ltd
Mio Industry Limited
Linyi Compass Supply Chain Co.,Ltd




Contents

Nails & Screws	1 - 11
Steel Coils & Roofing Tiles	13-21
Steel Products	23-29
Wire & Wire Mesh	31-35
Hardware,Tools & Machinery	37-45
Brush & Decorative Material	47-54
Lighting & Kitchenware	56-61
Tarpaulin & Plastic Products	63-66
Other Products	67-68

CUSTOMER VISIT, EXHIBITION CERTIFICATE



WORLD MAP

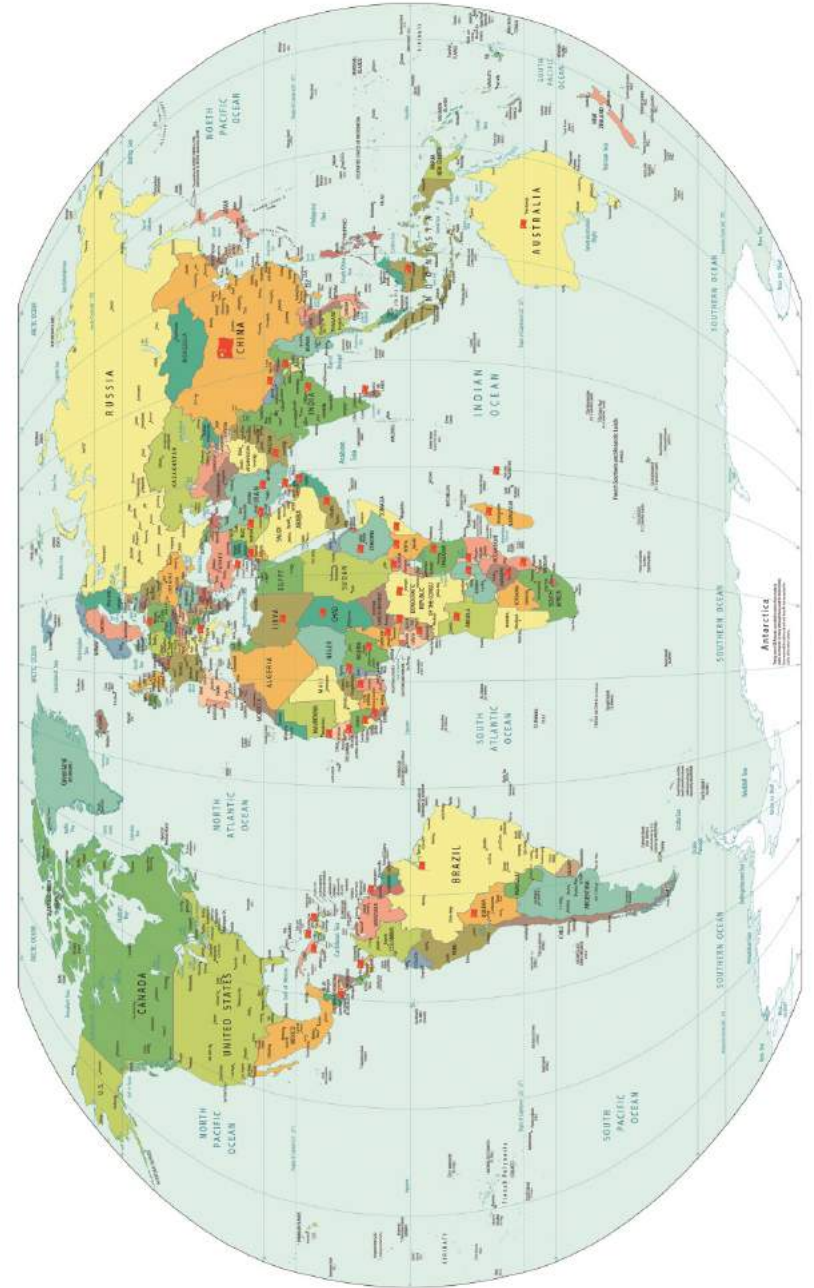

S.W.G. British Imperial Standard Wire Gage
 J.de.P. Paris Wire Gage
 A.S.W.G. American Standard Wire Gage

B.&S. Brown and Sharpe Wire Gage
 B.W.G. Birmingham Wire Gage
 W.G. Westphalia Wire Gage

Wire Guage Standard

Gage No.	S.W.G. mm	B.W.G. mm	B.&S. mm	A.S.W.G. mm	A.S.W.G. in.	J.de P mm	W.G. mm
3	6.401	6.58					
4	5.893	6.05					
5	5.385	5.59					
6	4.877	5.156	4.115	4.877	0.1920	1.100	1.00
7	4.470	4.572	3.665	4.496	0.1770	1.200	1.12
8	4.064	4.191	3.264	4.115	0.1620	1.300	1.20
9	3.658	3.759	2.906	3.767	0.1483	1.400	1.30
10	3.251	3.404	2.588	3.429	0.1350	1.500	1.40
11	2.946	3.048	2.304	3.061	0.1205	1.600	1.56
12	2.642	2.769	2.052	2.680	0.1055	1.800	1.66
13	2.337	2.413	1.826	2.324	0.0915	2.000	1.84
14	2.032	2.108	1.628	2.032	0.0800	2.200	2.04
15	1.829	1.829	1.450	1.829	0.0720	2.400	2.20
16	1.626	1.651	1.290	1.583	0.0625	2.700	2.40
17	1.422	1.473	1.151	1.372	0.0540	3.000	2.60
18	1.219	1.245	1.024	1.207	0.0475	3.400	.292
19	1.016	1.067	.916	1.041	0.0410	3.900	3.40
20	.9144	.8886	.8128	.8839	0.0348	4.400	3.84
21	.8128	.8128	.7239	.8052	0.0318	4.900	4.20
22	.7112	.7109	.6426	.7264	0.0286	5.400	4.65
23	.6096	.6347	.5740	.6553	0.0258	5.900	5.45
24	.5588	.5585	.5105	.5842	0.0230	6.400	5.96
25	.5080	.5078	.4547	.5182	0.0204	7.000	7.00
26	.4572	.4570	.4039	.4597	0.0181	7.600	7.60
27	.4166	.4062	.3607	.4394	0.0173	8.200	8.80
28	.3759	.3555	.3200	.4115	0.0162	8.800	9.40
29	.3454	.3300	.2875	.3810	0.0150	9.400	10.00
30	.3150	.3046	.2540	.3556	0.0140	10.000	
31	.2946	.2539	.2268	.3353	0.0132		
32	.2743	.2286	.2019	.3251	0.0128		
33	.2540	.2031	.1798	.2997	0.0118		
34	.2337	.1777	.1600	.2642	0.0104		
35	.2134	.1269	.1425	.2413	0.0095		
36	.1930	.1016	.1270	.2286	0.0090		
37	.1727		.1112	.2159	0.0085		
38	.1524		.1006	.2032	0.0080		
39	.1321		.0897	.1905	0.0075		
40	.1219		.0897	.1778	0.0070		

Nails & Screws



Nails & Screws



Common Wire Nails, Checkered Countersunk Head

SIZE INCH X BWG	LENGTH MM	DIAMETER MM	KG/1000 PCS	PCS/1KGS
3/8X20	9.52	0.89	0.046	21730
1/2X19	12.70	1.07	0.088	11360
5/8X18	15.87	1.25	0.152	6580
3/4X17	19.05	1.47	0.25	4000
1X16	25.40	1.65	0.42	2380
1-1/4X15	31.75	1.83	0.65	1540
1-1/2X14	38.10	2.11	1.03	971
1-3/4X13	44.45	2.41	1.57	637
2X12	50.80	2.77	2.37	422
2-1/2X11	63.50	3.05	3.58	279
3X10	76.20	3.40	5.35	187
3-1/2X9	88.90	3.76	7.65	131
4X8	101.66	4.19	10.82	92.4
4-1/2X7	114.30	4.57	14.49	69.0
5X6	127.00	5.16	20.53	48.7
6X5	152.40	5.59	28.93	34.5
7X4	177.80	6.05	40.32	24.8

Finishing Nails, Brad Head

Size	Length Inch	D ASWG
20	1	16-1/2
30	1-1/4	15-1/2
40	1-1/2	15
50	1-3/4	15
60	2	13
80	2-1/2	12-1/2
90	2-3/4	12-1/2
100	3	11-1/2
120	3-1/4	11-1/2
160	3-1/2	11
200	4	10



Nails & Screws

Common nails all kinds of packing



BULK 25KGS CARTON



500GRAM X 25 BOX



200GRAM X 80BAGS



ITALY 5KGS X 4BOX



16BOX /CARTON



MADAGASCAR 5KGS X 4BOX



CONGO 1KGS X 20BAG



25KGS/CARTON



25KGS/BAG



KUWAIT 16BOX /WOODEN CASE



1KGS X 25BAGS




WOODEN PALLET



**Galvanized Umbrella Head Roofing Nails
Twisted Shank / Smooth Shank**

Size	D1 mm	D2 mm	L mm
8BWG	4.2	20	2",2.5",3",3.5",4"
9BWG	3.76	20	2",2.5",3",3.5",4"
10BWG	3.4	20	2",2.5",3"
11BWG	3.15	18	1.5",2",2.5",3"
12BWG	2.8	16	1.5",2",2.5"
13BWG	2.4	14	1.5",2"




**Galvanized Ring Shank Roofing Nails
With Washer, Umbrella Head**

Size	D1 mm	D2 mm	L mm
8BWG	4.2	20	2",2.5",3",3.5",4"
9BWG	3.76	20	2",2.5",3",3.5",4"




**Assembled Roofing Nails, Umbrella Head
With Washer, Screw Shank / Ring Shank**

Size	D1 mm	D2 mm	D3 mm	L mm
7BWG	4.5mm	22mm	24.5mm	3",3.5",4"
8BWG	4.2mm	22mm	24.5mm	3",3.5",4"
9BWG	3.76mm	22mm	24.5mm	3",3.5",4"



**Galvanized Roofing Nails Flat Head
Plastic Cap, Screw Shank / Ring Shank**

Size	D1 mm	D2 mm	L mm
8BWG	4.2mm	23.5mm	2",2.5",3",3.5",4"
9BWG	3.76mm	23.5mm	2",2.5",3",3.5",4"



Roofing nails all kinds of packing



1KGS X 25BAGS / CARTON



7LBS BOX



8BOX / CARTON



1KGS X 20BOX



16BOX / WOODEN CASE



BURKINA FASO 350GRAM X 50BOXES



BURKINA FASO 50BOX / CARTON



50KGS / GUNNY BAG



25KGS / CARTON

Nails & Screws



Concrete Steel Nails / Masonry Nails Shank: Grooved Shank, Twisted Shank, Plain Shank, Spiral Shank, Angular Spiral Shank

Size	D mm	L inch	Material	Finish
3.0 X 1"	3.0	1"	45# or 60# carbon wire rod	E.Galvanized / Black
3.2 X 1.5"	3.2	1.5"	45# or 60# carbon wire rod	E.Galvanized / Black
3.6 X 2"	3.6	2"	45# or 60# carbon wire rod	E.Galvanized / Black
4.0 X 2.5"	4.0	2.5"	45# or 60# carbon wire rod	E.Galvanized / Black
4.2 X 3"	4.2	3"	45# or 60# carbon wire rod	E.Galvanized / Black
4.5 X 4"	4.5	4"	45# or 60# carbon wire rod	E.Galvanized / Black

J Bolt



Standard	Material	Finish	Diameter	Size
DIN ASTM etc	Carbon Steel Q195 Q235	Zinc plated	5.2mm 4.9mm	2", 2.5", 3", 3.5", 4"



150GRAM BOX



1KGS BOX



100PCS BOX



50PCS BOX



400GRAM X 50BOXES




WOODEN PALLET

Nails & Screws




Galvanized Roofing Bolt With Washer 1#

Material	D 1 mm	D 2mm	L mm
Q235	5.2	6	200-300
Q235	5.6	6.4	200-300
Q235	5.8	6.6	200-300
Q235	6.4	7.3	200-300



Galvanized Roofing Bolt With Washer 2#

Material	D 1 mm	D 2mm	L mm
Q235	5.2	6	200-300
Q235	5.6	6.4	200-300
Q235	5.8	6.6	200-300
Q235	6.4	7.3	200-300



Galvanized Roofing Bolt With Washer 3#

Material	D 1 mm	D 2mm	L mm
Q235	5.2	6	200-300
Q235	5.6	6.4	200-300
Q235	5.8	6.6	200-300
Q235	6.4	7.3	200-300



Galvanized Roofing Screw With Washer 1#

SIZE mm	D mm	L mm	Material
6.0X60	6	60	Q235
6.0X80	6	80	Q235
8.0X80	8	80	Q235



Galvanized Roofing Screw With Washer 2#


SIZE mm	D mm	L mm	Material
6.0X60	6	60	Q235
6.0X80	6	80	Q235
8.0X80	8	80	Q235

Nails & Screws




Drywall Screws

(Black Phosphated, Fine/Coarse Thread)



Size	DK	D	L
(#6) 3.5	7.80-8.00	3.35-5.53	16-55
(#7) 3.9	7.80-8.00	3.73-3.90	16-70
(#8) 4.2	7.80-8.00	4.04-4.22	16-102
(#10) 4.8	8.80-9.40	4.62-4.8	16-152


Chipboard Screws



Size	Length
∅ 2.5mm	10/12/16/20/25/30/35
∅ 3mm	12/16/20/25/30/35/40/45/50
∅ 3.5mm	12/16/20/25/30/35/40/45/50/55/60/70/80/90
∅ 4.0mm	12/16/20/25/30/35/40/45/50/55/60/70/80/90/100
∅ 4.5mm	16/20/25/30/35/40/45/50/55/60/70/80/90/100/110/120
∅ 5mm	20/25/30/35/40/45/50/55/60/70/80/90/100/110/120
∅ 6mm	20/25/30/35/40/45/50/55/60/70/80/90/100/110/120/130/140/150/160/180/200/220




Hex Washer Head Self Drilling Screws



Size	DK	K	D	L	S	DW
(#10) 4.8	9.80-10.50	3.80-4.30	4.62-4.80	13-100	7.78-8.00	14mm
(#12) 5.5	10.00-11.00	4.80-5.40	5.28-5.46	19-250	7.78-8.00	16mm
(#14) 6.3	12.20-13.50	5.30-5.90	6.03-6.25	19-250	9.78-10.00	16mm



Hex Washer Head Self Tapping Screws



Size	DK	K	S	D	L
(#10) 4.8	9.80-10.50	3.80-4.30	7.78-8.00	4.62-4.80	13-130
(#12) 5.5	10.00-11.00	4.80-5.40	7.78-8.00	5.28-5.46	19-250
(#14) 6.3	12.20-13.50	5.30-5.90	9.78-10.00	6.03-6.25	19-250




Nails & Screws


HEAD STYLES



HEAD RECESS




Self Drilling Screws CSK Head Philips



Size	DK	K(max)	P	D	L
(#6) 3.5	6.90-7.30	2.35	1.3	3.35-3.53	9.5-51
(#7) 3.9	7.14-7.50	2.35	1.3	3.73-3.90	9.5-51
(#8) 4.2	8.00-8.40	2.60	1.4	4.04-4.22	13-76
(#10) 4.8	8.90-9.30	2.80	1.6	4.62-4.80	13-120




Self Drilling Screws Wafer Head Philips



Size	A	H	D	L
(#7) 3.9	9.70-10.10	1.90-2.50	3.73-3.90	13-50
(#8) 4.2	10.20-11.10	1.90-2.50	4.04-4.22	13-76
(#10) 4.8	10.20-11.10	1.90-2.50	4.62-4.80	13-76



Self Tapping Screws Wafer Head Philips



Size	A	H	D	L
(#7) 3.9	9.70-10.10	1.90-2.50	3.73-3.90	13-50
(#8) 4.2	10.20-11.10	1.90-2.50	4.04-4.22	13-76
(#10) 4.8	10.20-11.10	1.90-2.50	4.62-4.80	13-76





Galvanized Square boat nails

Size	L mm	D mm	Finish
1"XBWG11	25	3.0	E.G./HDG
1.5X BWG10	38	3.4	E.G./HDG
2"XBWG8	50	4.2	E.G./HDG
3"XBWG7	76	4.5	E.G./HDG
4"XBWG6	101	5.2	E.G./HDG
5"XBWG5	127	5.6	E.G./HDG
6"XBWG4	152	6.0	E.G./HDG

**Fine Blue Shoe Tacks
(Three Star Brand Is Available)**



Size	D mm	Finish
3/8"	9.5	Dark Blue With Paraffin Wax
1/2"	12.7	Dark Blue With Paraffin Wax
5/8"	16	Dark Blue With Paraffin Wax
3/4"	19	Dark Blue With Paraffin Wax
1"	25	Dark Blue With Paraffin Wax
1-1/4"	32	Dark Blue With Paraffin Wax

Copper Nails / Clout Nails, Big Flat Head



Size	L mm	D mm	Shank	Finish
3/4"	19	2.8/3.0	Smooth / Barbed	E.G./HDG
1"	25	2.8/3.0	Smooth / Barbed	E.G./HDG
1-1/4"	32	2.8/3.0	Smooth / Barbed	E.G./HDG
1-1/2"	38	2.8/3.0	Smooth / Barbed	E.G./HDG
2"	50	2.8/3.0	Smooth / Barbed	E.G./HDG

Staples / U nails



Size	L mm	D mm	Point	Finish
3/4"	19	2.4/2.8/3.0	SKEW / DIAMOND	E.G./HDG
1"	25	2.4/2.8/3.0	SKEW / DIAMOND	E.G./HDG
1-1/4"	32	3.0/3.4/3.8	SKEW / DIAMOND	E.G./HDG
1-1/2"	38	3.0/3.4/3.8/4.2	SKEW / DIAMOND	E.G./HDG
2"	50	3.4/3.8/4.2	SKEW / DIAMOND	E.G./HDG

**Slotted Countersunk Flat Head Wood Screws
(DIN Standard)**



Gauge	L inch	L mm	Finish
3/3.5/4/4.5/5	3/4"	19	POLISHED
3/3.5/4/4.5/5	1"	25	POLISHED
3/3.5/4/4.5/5		30	POLISHED
3.5/4/4.5/5/5.5	1-1/4"	32	POLISHED
3.5/4/4.5/5/5.5		35	POLISHED
4/4.5/5/5.5/6	1-1/2"	38	POLISHED
4/4.5/5/5.5/6		40	POLISHED
4/4.5/5/5.5/6	2"	50	POLISHED

Blind Rivet, Aluminium



Size	L mm	D inch	D mm
1/4"	6.4	1/8".5/32".3/16".1/4"	3.2/4.0/4.76
5/16"	8	1/8".5/32".3/16".1/4"	3.2/4.0/4.76
3/8"	9.5	1/8".5/32".3/16".1/4"	3.2/4.0/4.76/6.4
1/2"	12.7	1/8".5/32".3/16".1/4"	3.2/4.0/4.76/6.4
9/16"	14	1/8".5/32".3/16".1/4"	3.2/4.0/4.76/6.4
5/8"	15.7	1/8".5/32".3/16".1/4"	3.2/4.0/4.76/6.4
3/4"	19	1/8".5/32".3/16".1/4"	3.2/4.0/4.76/6.4
1"	25	1/8".5/32".3/16".1/4"	3.2/4.0/4.76/6.4

Cut Masonry Nails, Blunt point, Tapered Shank




Size	L mm	Finish
1-1/2"	38	POLISHED/E.G./HDG
2"	50	POLISHED/E.G./HDG
2-1/2"	63.5	POLISHED/E.G./HDG
3"	76	POLISHED/E.G./HDG
4"	101	POLISHED/E.G./HDG

Coils Nails




Size	L mm	D inch	D mm	Pcs x Coils /carton
1-1/4"	32	0.086/0.092	2.1/2.3	350 X 40
1-1/2"	38	0.086/0.092	2.1/2.3	350 X 40
1-3/4"	45	0.086/0.092	2.1/2.3	300 X 30
2"	50	0.092/0.099	2.3/2.5	300 X 30
2-1/4"	57	0.092/0.099	2.3/2.5	300 X 30
2-1/2"	64	0.092/0.099	2.3/2.5	300 X 30
2-3/4"	70	0.099/0.113	2.5/2.8	225 X 20
3"	75	0.113/0.12	2.8/3.0	225 X 20
3-1/8"	80	0.113/0.12	2.8/3.0	225 X 20
3-1/2"	90	0.12/0.131	3.0/3.3	225 X 20
4"	100	0.131	3.3	150 X 20

Nails & Screws



10J Staples

Gauge	20
Thickness	0.60±0.01mm
Width	1.20±0.02mm
Finish	Galvanized & Coated
Length	4mm 6mm 8mm 10mm 13mm 16mm 19mm 22mm



F Finish Brads

Gauge	18
Head	2.0x1.25mm
Thickness	1.01±0.01mm
Width	1.25±0.02mm
Finish	Galvanized & Coated
Length	10mm 15mm 20mm 25mm 30mm 32mm 35mm 40mm 45mm 50mm




T Finish Brads


Gauge	16
Head	2.90mmx1.59mm
Thickness	1.33±0.01mm
Width	1.59±0.02mm
Finish	Galvanized & Coated
Length	20mm 25mm 30mm 32mm 38mm 40mm 45mm 50mm 64mm




ST Nails

Head	6.40mmx2.20mm
Shank Diameter	2.20mm
Finish	Galvanized & Black Oxide
Material	55 Steel
Length	18mm 25mm 32mm 38mm 45mm 50mm 57mm 64mm

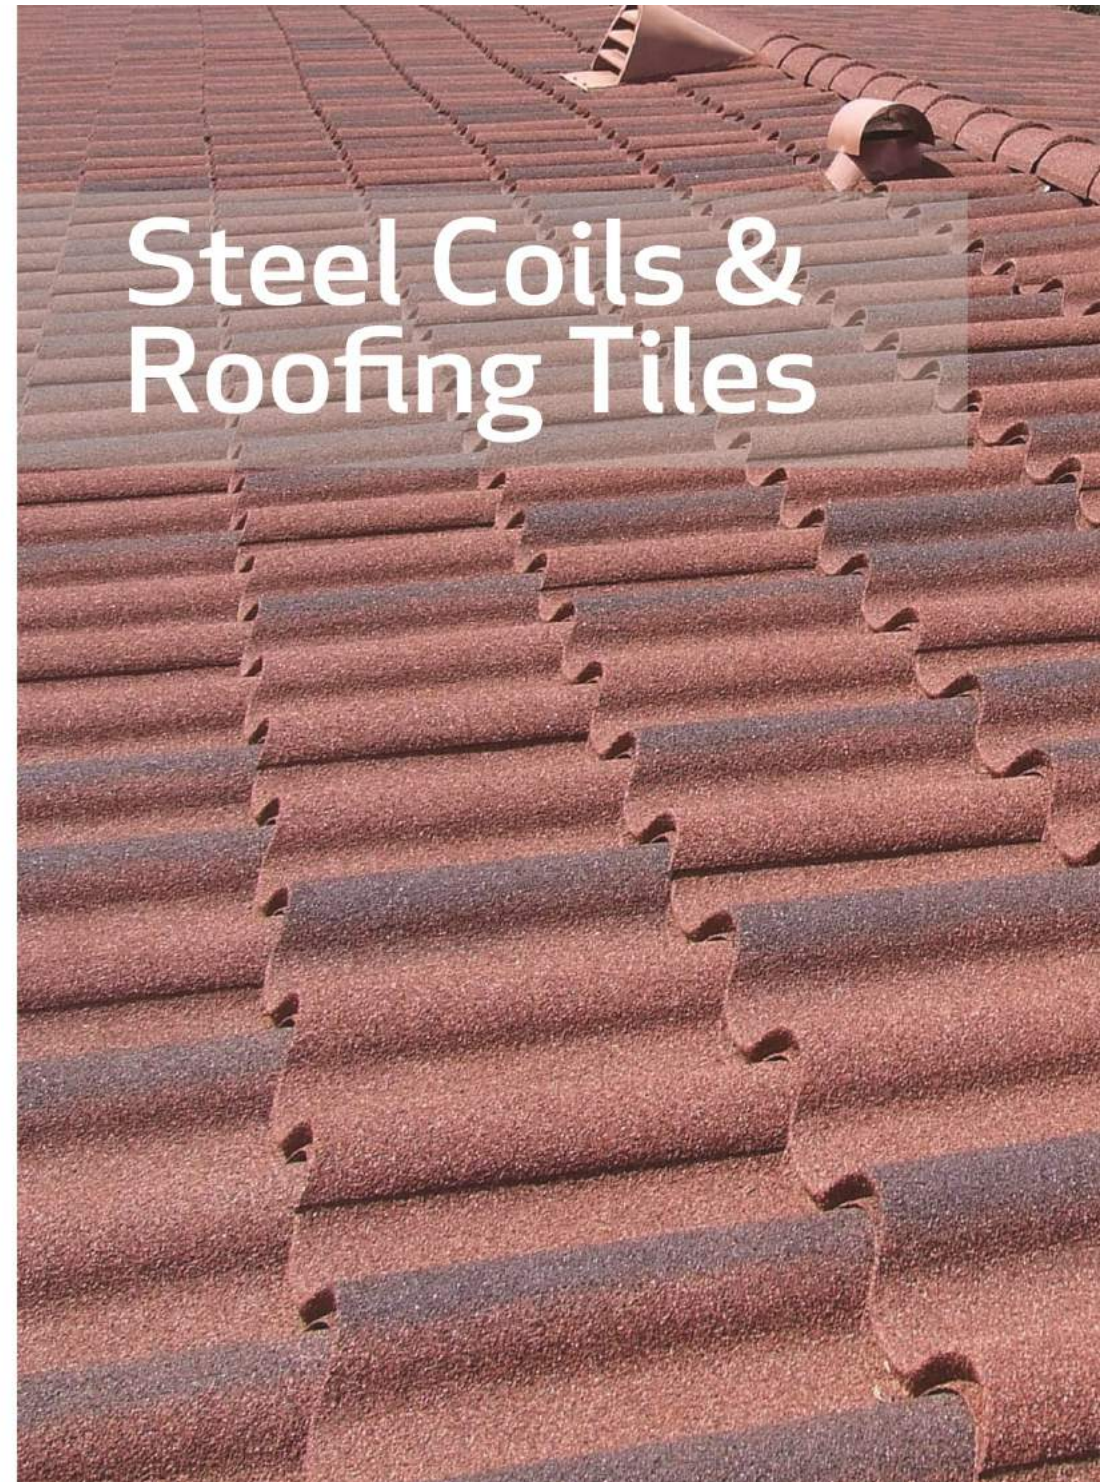





Type	FX28-207-828
Effective Width / Full Width(mm)	828/935
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX23-183-1100
Effective Width / Full Width(mm)	1100/1180
Feeding Width (mm)	1250
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX27-190-950
Effective Width / Full Width(mm)	950/1040
Feeding Width (mm)	1200
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX35-185-740
Effective Width / Full Width(mm)	740/800
Feeding Width (mm)	960
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX30-152-760
Effective Width / Full Width(mm)	760/820
Feeding Width (mm)	980
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX25-210-630
Effective Width / Full Width(mm)	630/680
Feeding Width (mm)	750
Thickness (mm)	0.2-0.8
Installation Type	



Type	FX25-210-840
Effective Width / Full Width(mm)	840/890
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	



Type	FX18-76-836
Effective Width / Full Width(mm)	836/900
Feeding Width (mm)	1000
Thickness (mm)	0.12-0.6
Installation Type	




Type	FX18-76-760
Effective Width / Full Width(mm)	760/800
Feeding Width (mm)	900
Thickness (mm)	0.12-0.6
Installation Type	




Type	FX18-76-610
Effective Width / Full Width(mm)	610/665
Feeding Width (mm)	750
Thickness (mm)	0.12-0.6
Installation Type	






Type	FX35-125-750
Effective Width / Full Width(mm)	750/820
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX50-410-820
Effective Width / Full Width(mm)	820/840
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX75-200-600
Effective Width / Full Width(mm)	600/650
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX76-150-688
Effective Width / Full Width(mm)	688/750
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX15-225-900
Effective Width / Full Width(mm)	900/940-950
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	



Type	FX28-205-820
Effective Width / Full Width(mm)	820/910
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	



Type	FX12-110-880
Effective Width / Full Width(mm)	880/900-910
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	



Type	FX25-205-1025
Effective Width / Full Width(mm)	1025/1100
Feeding Width (mm)	1200
Thickness (mm)	0.15-0.8
Installation Type	



Wave Tile

Thickness	0.4mm
Tiles Size	1280X430X0.4mm
Install Size	1150X370X0.4mm
Cover Area	2.33pcs/sqm
Weight	3.1kgs/pcs



Deep Rome

Thickness	0.4mm
Tiles Size	1300X420X0.4mm
Install Size	1250X370X0.4mm
Cover Area	2.16pcs/sqm
Weight	3kgs/pcs



Scales Tile

Thickness	0.4mm
Tiles Size	610X215X0.4mm
Cover Area	12pcs/sqm
Weight	0.5kgs/pcs

Slate Tile

Thickness	0.4mm
Tiles Size	1300X420X0.4mm
Install Size	1290X370X0.4mm
Cover Area	2.16pcs/sqm
Weight	3kgs/pcs

Classical Tile

Thickness	0.4mm
Tiles Size	1340X420X0.4mm / 1400X420X0.4mm
Install Size	1290X370X0.4mm / 1340X370X0.4mm
Cover Area	2.08pcs/sqm 2pcs/sqm
Weight	2.8kgs/pcs 3kgs/pcs

Rainbow Tile

Thickness	0.4mm
Tiles Size	1300X420X0.4mm
Install Size	1250X370X0.4mm
Cover Area	2.16pcs/sqm
Weight	3kgs/pcs

Shingle Tile

Thickness	0.4mm
Tiles Size	1340X420X0.4mm
Install Size	1290X370X0.4mm
Cover Area	2.08pcs/sqm
Weight	2.8kgs/pcs

Makuti Grained Tile

Thickness	0.4mm
Tiles Size	1340X420X0.4mm
Install Size	1290X370X0.4mm
Cover Area	2.08pcs/sqm
Weight	2.8kgs/pcs



Milano Tile

Thickness	0.4mm
Tiles Size	1340X420X0.4mm
Install Size	1290X370X0.4mm
Cover Area	2.08pcs/sqm
Weight	2.8kgs/pcs



Modern Classical Tile

Thickness	0.4mm
Tiles Size	1340X420X0.4mm
Install Size	1290X370X0.4mm
Cover Area	2.08pcs/sqm
Weight	2.8kgs/pcs



Joint Tile

Thickness	0.4mm
Tiles Size	860X830X0.4mm
Install Size	830X770X0.4mm
Cover Area	1.62pcs/sqm
Weight	3.2kgs/pcs




Antique Tile

Thickness	0.4mm
Tiles Size	730X740X0.4mm
Install Size	650X700X0.4mm
Cover Area	2.2pcs/sqm
Weight	2.8kgs/pcs





Modern Classical Tile

Thickness	0.4mm
Tiles Size	1340X420X0.4mm
Install Size	1290X370X0.4mm
Cover Area	2.08pcs/sqm
Weight	2.8kgs/pcs



Z & C Profile




Ridge caps 1

Thickness	Feeding Width	Length
0.17-0.7	300mm	0.9-5.8meter




Ridge caps 2

Thickness	Feeding Width	Length
0.17-0.7	500mm	0.9-5.8meter



Ridge caps 3


Thickness	Feeding Width	Length
0.17-0.7	500mm	0.9-5.8meter




Ridge caps 1



Ridge caps 2



Ridge caps 3



Ridge caps 3



Frp Sheet / Fiberglass




Galvalume Corrugated Sheet



Kraft Paper Packing



Trapezoidal Color Sheet



Corrugated Color Sheet



HDG Corrugated Sheet



Trapezoidal Color Sheet



Color Coated Glazed Tile



Steel Pallet Packing



Coils Fixed In Container



Color Coated Glazed Tile

Steel Coils & Roofing Tiles



PPGI Steel Coil

Material	galvanized / aluzinc steel coil, SGCC, DX51D-Z/AZ
Thickness	0.14-1.2mm
Width	<=1250mm
Color	Red, blue, white or any other RAL color.
Hardness	50HRB to 90HRB
Zinc coating	40g / m ² to 275G / m ²
Top / Back coating	12um to 25 / 5um to 10um



Hot Dipped Galvanized Coils

Metal base	cold rolled steel coil
Thickness	0.12-1.2mm
Width	<=1250mm
Zinc	40-275gram / M ²
Surface treatment	passivation, oiling
Spangle types:	zero / small / regular / big spangle




Galvalume Coils

Metal base	cold rolled steel coil
Thickness	0.12-1.2mm
Width	<=1250mm
Zinc	40-275gram / M ²
Surface treatment	passivation, oiling
Spangle types:	small / regular / big spangle



Aluminum Coil

Alloy	A3003 A1100 A8011
Standard width	1200mm,1240mm,1000mm, Max width is 1700mm
ID	150mm,405mm or 505mm
Aluminum thickness	0.02mm-0.80mm

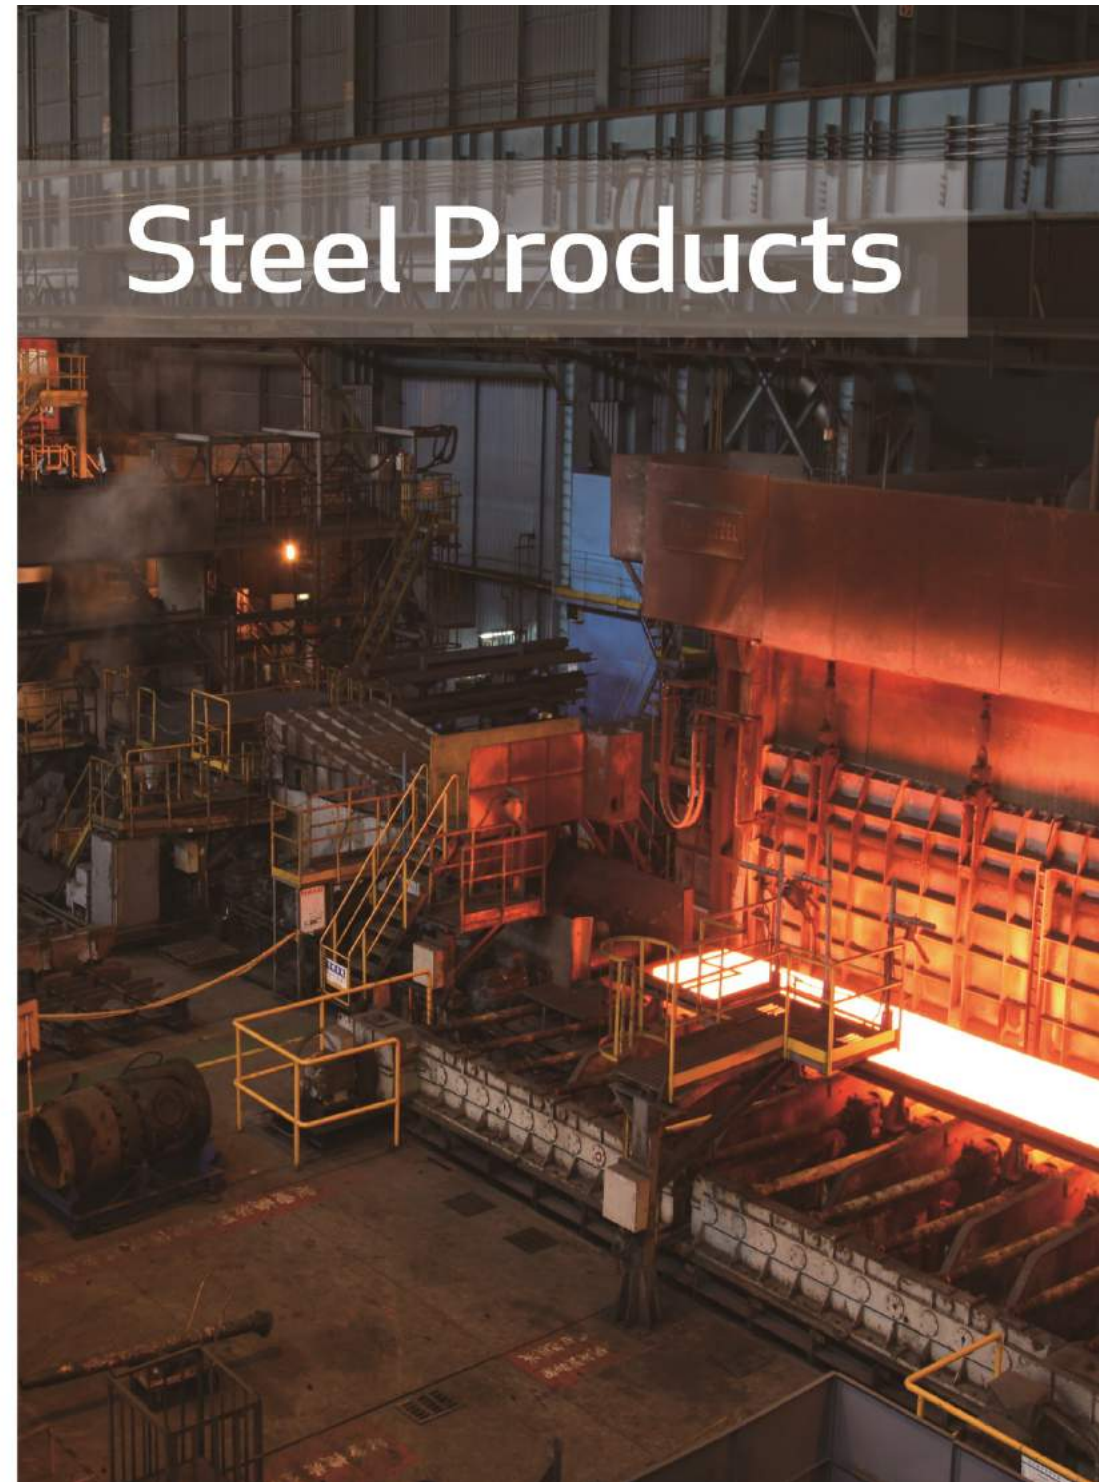

ERW Pipe



Outer diameter	12.7-406mm
Wall thickness	1.2-12mm
Surface	Hot Dipped Galvanized,Black Pipe
Material	10#,20#,Q195,Q215,Q235 or according to request
Length	5.8-12 meter
Standard	BS1387,ASTM-A53A,API 5L,JIS-G3444,GB/T3091-2001
Application	structure,transportation of oil and natural gas,water thread and coupling are optional

mm(OD)		mm(OD)		Thickness/Weight											
DN				Sch.5S			Sch.10S			Sch.20S			Sch.40S		
DN	NPS	in.	mm	in.	mm	Kg/m	in.	mm	Kg/m	in.	mm	Kg/m	in.	mm	Kg/m
15	1/2	0.840	21.34	0.065	1.65	0.809	0.083	2.11	1.010						
20	3/4	1.050	26.67	0.065	1.65	1.030	0.083	2.11	1.290						
25	1	1.050	33.40	0.065	1.65	1.300	0.109	2.77	2.110	0.120	3.05	2.310	0.133	3.38	2.530
32	1 1/4	1.660	42.16	0.065	1.65	1.670	0.109	2.77	2.720	0.120	3.05	2.970	0.140	3.56	3.420
40	1 1/2	1.900	48.26	0.065	1.65	1.920	0.109	2.77	3.140	0.120	3.05	3.490	0.145	3.68	4.090
50	2	2.375	60.33	0.065	1.65	2.410	0.109	2.77	3.970	0.120	3.05	4.350	0.145	3.91	5.500
65	2 1/2	2.875	73.03	0.083	2.11	3.730	0.120	3.05	5.320	0.156	3.96	6.810	0.203	5.16	8.720
80	3	3.500	88.90	0.083	2.11	4.560	0.120	3.05	6.520	0.156	3.96	8.380	0.216	5.49	11.40
90	3 1/2	4.000	101.60	0.083	2.11	5.230	0.120	3.05	7.490	0.156	3.96	9.630	0.226	5.74	13.70
100	4	4.500	114.30	0.083	2.11	5.900	0.120	3.05	8.450	0.203	5.16	14.00	0.237	6.02	16.20
125	5	5.563	141.30	0.109	2.77	9.560	0.134	3.40	11.700	0.203	5.16	17.50	0.258	6.55	22.00
150	6	6.625	168.28	0.109	2.77	11.40	0.134	3.40	14.000	0.216	5.49	22.30	0.280	7.11	28.50
200	8	8.625	219.08	0.109	2.77	14.90	0.148	3.76	20.200	0.237	6.02	32.00	0.322	8.18	42.90
250	10	10.75	273.05	0.134	3.40	22.80	0.165	4.19	28.100	0.237	6.02	40.00	0.365	9.27	60.90
300	12	12.75	323.85	0.156	3.96	31.60	0.180	4.57	36.300	0.237	6.02	47.70	0.375	9.53	74.60
350	14	14.00	355.60	0.156	3.96	34.70	0.188	4.78	41.800	0.258	6.55	57.00	0.437	11.1	95.30
400	16	16.00	406.40	0.165	4.19	42.00	0.188	4.78	47.800	0.258	6.55	65.20	0.437	11.1	109.3
450	18	18.00	457.20	0.165	4.20	47.39	0.203	5.16	58.100	0.322	8.18	91.49	0.563	14.3	157.77
500	20	20.00	508.00	0.203	5.16	507.34	0.217	5.50	507.25	0.375	9.53	505.74	0.595	15.1	502.32
550	22	22.00	558.80	0.203	5.16	558.14	0.217	5.50	558.05	0.375	9.53	556.54	0.626	15.9	552.5
600	24	24.00	609.60	0.216	5.49	82.620	0.285	6.50	97.65	0.375	9.53	142.45	0.689	17.5	285.11
700	28	28.00	711.20	0.216	5.49	710.45	0.322	8.18	709.53	0.500	12.7	707.18	0.689	17.5	703.57
750	30	30.00	762.00	0.258	6.55	760.93	0.322	8.18	760.33	0.500	12.7	757.98	0.689	17.5	754.37
800	32	32.00	812.80				0.322	8.18	811.13	0.500	12.7	808.78	0.689	17.5	805.17
850	34	34.00	863.60				0.322	8.18	861.93	0.500	12.7	859.58	0.689	17.5	855.97
900	36	36.00	914.40				0.322	8.18	912.73	0.500	12.7	910.38	0.748	19.1	905.31
1000	40	40.00	1016.0				0.375	9.53	1013.74	0.563	14.3	1010.91	1.031	26.2	998.91



Pipe Fitting



Equal Angle Bar

Description	Standard	Specification
Equal Angle Bar	GB	Q195,Q235,Q345
	JIS	SS400,SS540



Unequal Angle Bar

Description	Standard	Specification
Unequal Angle Bar	ASTM	A36,A572 GR50
	EN	S235JR,S275JR,S355JR



Square Hollow Section / Rectangle Hollow Section

Standard	DIN EN 10210,DIN EN 10219,ASTMA500,GB/T 3094-2000,GB/T 6728-2002,GB/T 178-2005,JIS G3466
Material	20#,Q195,Q235,Q345
OD	10*10mm-600*600mm
Wall Thickness.	0.5mm-25mm
Length	As per customer's requirement
Packing	standard export packing in bundles
Surface	hot dipped galvanized,Oiled or paint coated to prevent rust





Cold Rolled Round Pipe

Thickness	0.5-1.3MM
Length	5.8M or as request
Material	Q195, Q235
Size mm	12/13/14/16/18/19/19.8/20/21.5/21.7/22 24/25/28/30/32/35/36/38/40/42/45 47/48/50/60/70/80/85/88/100



Round Bar


Length	6 M
Material	SS400
Size mm	8.0/8.5/9/9.5/10/10.5/11/11.5/12/13/14.....30 80,85,90.....150,160



Re-Bar/ Deformed Steel Bar

Standard	Specification
GB	HRB335, HRB400, HRB500
JIS	S0390, S0490, S0400
ASTM	Gr 300, 420, 520, ASTM A615 GR60
EN	B54449 Gr460, Gr500

Specification	Size (mm)	Specification	Size (mm)
B54449	6/8/10/12/14/16/18/20 22/25/28/32/36/40/50	ASTM A615	10/13/16/19/22
DIN488		ASTM A616	25/29/32/36/43
G05T5781		ASTMA706	
G81499			



IPE

Size	Depth x Flange (mm)	Web Thickness (mm)	Flange Thickness(mm)	Weight(kg/m)
IPE100	100X55	4.1	5.7	8.1
IPE120	120X64	4.4	6.3	10.4
IPE140	140X73	4.7	6.9	12.9
IPE160	160X82	5.0	7.4	15.8
IPE180	180X91	5.3	8.0	18.8
IPE200	200X100	5.6	8.5	22.4
IPE220	220X110	5.9	9.2	26.2
IPE240	240X120	6.2	9.8	30.7
IPE270	270X135	6.6	10.2	36.1

IPE AA

Size	Depth x Flange (mm)	Web Thickness (mm)	Flange Thickness(mm)	Weight(kg/m)
IPEAA80	80 X 46	3.2	4.2	4.95
IPEAA100	100 X 55	3.6	4.5	6.72
IPEAA120	120 X 64	3.6	4.8	8.36
IPEAA140	140 X 73	3.8	5.2	10.05
IPEAA160	160 X 82	4.0	5.6	12.31



Hot Rolled Steel Coils


Size	L
1.8/2.0/2.3/2.5/2.75/3.0/3.5/3.75/4.0/4.5/4.75/5.5/5.75/7.5/7.75mm	1250/1500mm
9.5/9.75/11.5/11.75/13.5/15.5mm	1500mm

Type	Standard	Specification
Commercial quality	GB700, GB1591, GB/T6653	Q195, Q235, Q255, Q345, HP295, HP325, HP345
	JIS3101, JIS G 3132, JIS G 3106	S5330, S5400, S5490, SPHT1, SPHT2, SPHT3, SM400, SM490, SM520
	EN10025/10149	S235JR, S235JR G2, S275JR, S355JR, S355MC, 420MC
Cold re-rolling & forming usage	ASTM	A36
	SAE	SAE1006, SAE1008, SAE1010
	As per mill protocol	CY20, CY07, RDX07
Pipeline usage	GB699	QSAI
	JIS G3131	SPHC, SPHD, SPHE
	GB/T14164-2005 GB/T9711.2-1997	SLB_X42, X46, X52, X60, X65, X70, X80 LG360MB, L450MB
	As per mill protocol	J55CASING, J55TUBING



C-Profiles/Section

	Size (mm)				Cross-section area (mm ²)	Weight
	h	b	a	t	cm ²	kg/m
C80	80	40	15	2.0	3.640	2.860
C100	100	50	15	2.5	5.500	4.320
C120	120	50	20	2.5	6.250	4.910
C120	120	60	20	3.0	8.040	6.310
C140	140	60	20	3.0	8.640	6.780
C160	160	70	20	3.0	9.840	7.720
C180	180	70	20	3.0	10.44	8.200
C200	200	70	20	3.0	11.04	8.670
C220	220	70	20	3.0	11.64	9.140
C240	240	100	20	3.0	12.24	9.610
C260	260	100	20	3.0	12.84	10.08
C280	280	100	20	3.0	13.44	10.55
C300	300	100	20	3.0	14.04	11.02



Hot Rolled Steel Plate

Assortment	Thickness(mm)	Width(mm)	Length(or ID of Coil)
HR Plate	5-200 MAX650	1500-5100	5000-18000



Channel Bar

Standard	Size mm
CHANNEL BAR (GB,Q235B)	50*37*4.5,63*40*4.8,80*43*5.0,100*48*5.3,120*53*5.5 140*58*6.0,160*63*6.5,180*68*7.0,200*73*7.0
UPN (EN10025,S235JR)	140*60*7.0,160*65*7.5,180*70*8.0,200*75*8.5
UPE (EN10025,S235JR)	80*40*4.5,100*46*4.5,120*52*4.8,140*58*4.9,160*64*5.0 180*70*5.1,200*76*5.2



Hot Rolled Wire Rod

Specification	SAE1008-SAE1022,Q195,Q235,L,Y,H08A,XER705-6,S45C,S20C, 10B10,10B18,10B21,10B28,10B33,10B38,SWRCH6A-15A, WRCH35K/40K/45K/,ML08ALSWRCH18A/22A,SWRH77B, SWRH42A/62A/72A/72B/77B/82B/,XGLX72A,SWRH82B, 30MNS1B,30MNSI,ML40CR,SCM435,SCM440,50BV30,SCR420B, CHIT,XGM6,GCR15,20CRMNT1,30CRMNT1,20MN2,25MNV
Size Range	DIA5.5MM-34MM



Cold Rolled Coil/Sheet

Size Range	Coil ID	Coil weight
0.15-3.0mmx800-2000mmxCoil	508mm/610mm	5-25MT

	Assortment	Thickness(mm)	Width(mm)	Length(or ID of Coil)
Sheet	Cutting Edge	0.30-3.50	700-1830	1000-6000
	Mill Edge		700-1850	
Coil	Cutting Edge	0.30-3.50	700-1830	508/610
	Mill Edge		700-1850	
Longitudinal Cutting Strip		0.10-3.50	198-900	450/610/508



Flat Bar


Material	Thickness	Width	Length
Q195, Q235, Q345, A36, S235JR, S5400, ST37-2	2mm-13mm	19mm-80mm	1000mm-12000mm



Hot Rolled Chequered Coils/Sheet

Assortment	Thickness(mm)	Width(mm)	Length(or ID of Coil)
Sheet	2.5-10	1000-1500	2000-12000
Coil	2.5-10	1000-1500	760±20

Square Bar



Size(mm)	Density(kg/m)	Size	Density(kg/m)
8.0	0.502	17	2.27
8.5	0.567	18	2.54
9.0	0.636	19	2.83
9.5	0.708	20	3.14
10.0	0.785	21	3.46
10.5	0.865	22	3.80
11.0	0.950	23	4.15
11.5	1.04	24	4.52
12	1.13	25	4.91
13	1.33	26	5.31
14	1.54	27	5.72
15	1.77	28	6.15
16	2.01	29	6.60
16		30	7.06

Cold Rolled Strips(Material Q195-345)



Width	Thickness	Coil Weight	Coil ID
31-35,60-68,79-83, 100-105,128-135,150-156, 190-204,230-245,248-260, 270-275,295-305,310-320, 330-340,350-355	0.2-2.0	700-1500kgs	450-500mm

Hot Rolled Strips(Material Q195-345)



Width	Thickness	Coil Weight	Coil ID
160,183,195,200,202,204, 208,210,235,260,271,272, 292,295,298,300,305,315, 335,352,355,375,395,400, 410,413,415,425,432,438, 490,500,505,510,520,600, 630,685	1.2-7.5	700-1500kgs	450-500mm

Hot Dip Galvanized Steel Strips



Size	Thickness	Zinc Coating	Material
465-730 For Pipe	1.0-3.0mm	40-300Gram	Q195/Q235B/Q345B
356-415 For C/Z Profile	1.0-3.0mm	40-300Gram	Q195/Q235B/Q345B
183-355 For C/Z Profile	1.0-3.0mm	40-300Gram	Q195/Q235B/Q345B



Wire & Wire Mesh





Galvanized Iron Wire

The varieties of products	Hot dipped galvanized wire, electro-galvanized iron wire
The standard size	BWG6-BWG36
T/S (kg/mm ²)	30-45
Package	0.5-800kg/coil,inside plastic film,outside plastic weaving bag or hessian cloth

Black Annealed Wire

The varieties of products	Black annealed iron wire,soft
The standard size	BWG5-BWG39
T/S (kg/mm ²)	30-45
Treating	oil painting,without oil
Package	0.5-800kg/coil,inside plastic film,outside plastic weaving bag or hessian cloth



Straight Cut Iron Wire

Wire diameter	Specification
0.7mm-1.6mm	20cm-60cm
1.6mm-4.0mm	60cm-6m



U Tie Wire

Dia	Length	Type	Shape	Packing
2.0mm-5.0mm	250mm-3000mm	Black U Tie Wire and Galvanized U Tie Wire	Normal Shape and Special Shape	According to customer's request
0.7mm-1.2mm	250mm-750mm			



Barbed Wire

Type	Wire Gauge (SWG)	Barb Distance	Barb Length
Electro Galvanized Barbed Wire	10# X 12#	7.5-15cm	1.5-3cm
	12# X 12#		
	12# X 14#		
14# X 14#			
Hot-dip Galvanized Barbed Wire	14# X 16#		
	16# X 16#		
	16# X 18#		



Razor Wire

Reference Number	Blade Style	Thickness	Wire Dia	Barb Length	Barb Width	Barb spacing
BTO-12		0.5±0.05	2.5±0.1	12±1	15±1	26±1
BTO-18		0.5±0.05	2.5±0.1	18±1	15±1	33±1
BTO-22		0.5±0.05	2.5±0.1	22±1	15±1	34±1
BTO-28		0.5±0.05	2.5	28	15	45±1
BTO-30		0.5±0.05	2.5	30	18	45±1
BTO-60		0.6±0.05	2.5±0.1	60±2	32±1	100±2
BTO-65		0.6±0.05	2.5±0.1	65±2	21±1	100±2

Welded Wire Mesh

Opening		Wire Diameter<BWG>
In inch	In metric unit(mm)	
1/4" X 1/4"	6.4mm X 6.4mm	22,23,24
3/8" X 3/8"	9.5mm X 9.5mm	19,20,21,22
1/2" X 1/2"	12.7mm X 12.7mm	16,17,18,19,20,21,22,23
5/8" X 5/8"	16mm X 16mm	18,19,20,21
3/4" X 3/4"	19.1mm X 19.1mm	16,17,18,19,20,21
1" X 1/2"	25.4mm X 12.7mm	16,17,18,19,20,21
1" X 1"	25.4mm X 25.4mm	14,15,16,17,18,19
1-1/2" X 1-1/2"	38mm X 38mm	14,15,16,17,18,19
1" X 2"	25.4mm X 50.8mm	12,13,14,15,16
2" X 2"	50.8mm X 50.8mm	12,13,14,15,16

1. Standard roll length: 30m,width: 0.5m to 1.8m
2. Packing: in waterproof paper in rolls. Customer packing available at request



PVC Coated Welded Wire Mesh


Gauge	Mesh	Note
2.0mm/2.6mm	4" X 2"	1. Gauge:BWG 12 to 24 2. Mesh : 1/4", 3/8", 5/8", 1/2", 3/4", TO 6" 3. Width:2' to 7' 4. Length:10' to 300' 5. Packing: Moisture-proof brown paper or PVC film 6. Color: green,black as special requirements
1.9mm/2.5mm	3" X 2"	
1.9mm/2.5mm	2" X 2"	
1.9mm/2.5mm	2" X 1"	
1.6mm/2.1mm	1-1/2" X 1-1/2"	
1.2mm/1.9mm	1" X 1"	
0.8mm/1.1mm	3/4" X 3/4"	
0.6mm/0.7mm	1/2" X 1/2"	



Deformed Steel Welded Mesh

Thickness	Hole	Width	Length	Packing
4-12MM	10X10cm, 10X20cm 15X15cm, 20X20cm	less than 5.8m	3-100m	Pcs or In Rolls





Chain Link Fence (E.G./H.D.G/PVC)

Mesh	Wire Gauge	Width	Length
2"	BWG8,9,10,11,12,13	0.5-4M	5-25M
2 1/2"	BWG8,9,10,11,12	0.5-4M	5-25M
3"	BWG8,9,10,11,12	0.5-4M	5-25M
3 1/2"	BWG8,9,10,11,12	0.5-4M	5-25M
4"	BWG8,9,10,12	0.5-4M	5-25M



Hexagonal Wire Netting (E.G./H.D.G/PVC)

Aperture(inch)	Wire gauge	Size(feet)
1"	17#,18#,19#,20#,21#,22#,23#,24#,25#	3' X 100'
1 1/4"	18#,19#,20#,21#,22#	3' X 100'
1 1/2"	17#,18#,19#,20#,21#,22#,23#	3' X 100'
2"	17#,18#,19#,20#,21#,22#,23#	3' X 100'
3"	16#,17#,18#,19#,20#	3' X 100'
1 1/2"	22#,23#,24#,25#,26#	3' X 100'
5/8"	21#,22#,23#,24#,25#	3' X 100'
3/4"	20#,21#,22#,23#,24#,25#	3' X 100'

The width and length can be adjusted as the request of the customers

Expanded Metal

- SWD-short way diamond
- LWD-long way diamond
- BOND-where two strands intersect
- STRAND WIDTH-length of the metal used to produce one strand
- STRAND THICKNESS-gauge thickness
- LWM(width)-mesh sheet size,the distance of lwd direction
- SWM(Length)-mesh sheet size,the distance of swd direction



Square Wire Mesh

Mesh No.	Wire	Size
1.5 mesh	1mm	3' x 100', 4' x 100', 5' x 100'
2 mesh	1mm-1.6mm	3' x 100', 4' x 100', 5' x 100'
3 mesh	0.6mm-1.6mm	3' x 100', 4' x 100', 5' x 100'
4 mesh	0.4mm-1.5mm	3' x 100', 4' x 100', 5' x 100'
5 mesh	0.35mm-1.5mm	3' x 100', 4' x 100', 5' x 100'
6 mesh	0.35mm-1.5mm	3' x 100', 4' x 100', 5' x 100'
8 mesh	0.3mm-1.2mm	3' x 100', 4' x 100', 5' x 100'
10 mesh	0.3mm-1.2mm	3' x 100', 4' x 100', 5' x 100'
12 mesh	0.3mm-1.2mm	3' x 100', 4' x 100', 5' x 100'
14 mesh	0.2mm-0.7mm	3' x 100', 4' x 100', 5' x 100'
16 mesh	0.2mm-0.6mm	3' x 100', 4' x 100', 5' x 100'
18 mesh	0.2mm-0.45mm	3' x 100', 4' x 100', 5' x 100'
20 mesh	0.2mm-0.45mm	3' x 100', 4' x 100', 5' x 100'



Steel Fence

Material	Low carbon steel wire.
Structure	Weaved or welded by low carbon steel wire. fixed by the linking accessories and steel pipe.
Characteristics	High strength, good steel natural capacity, wonderful shape, wild field of vision, easy to install.
Anticorrosion	Electro galvanized, hot dip galvanized, plastic spraying coated.
Uses	Be applied as protection fencing of highway, railway, airport, residential area, port, garden and farming, etc.



Wire & Wire Mesh



Stainless Steel Window Screening

Mesh	Wire Dia	Size	Application
14 X 14	SWG38	3' X 100'	Material 302 304 316 316L
16 X 16	SWG37	4' X 100'	
18 X 18	SWG36	1 X 25m	
18 X 14	SWG35	1.2 X 25m	
20 X 20	SWG34	1.5 X 25m	



Galvanized Iron Window Screening

Mesh	Wire Gauge	Size	Application
10X10			Electric Galvanized after weaving. White or light-blue
14X14	BWG31	3' X 100'	
16X16		4' X 100'	
18X18	BWG32	1 X 25m	
18X14	BWG33	1.2 X 30m	
22X22	BWG34	1.5 X 25m	
24X24			




Aluminum Alloy Window Screening

Mesh	Wire Gauge	Size	Application
14 X 14			Material Al-mg. alloy or pure aluminum
16 X 14	SWG31*	3' X 100'	
18 X 14	SWG32*		
18 X 16	SWG33*	4' X 100'	
20 X 18	SWG34*		
24 X 22			
26 X 24			



Nylon Window Screening

Mesh	Wire Gauge	Size	Application
10 X 10			Mesh12,14,16: Hinged weave
14 X 14	BWG31	3' X 100'	
16 X 16		4' X 100'	
18 X 18	BWG32	1 X 25m	Mesh18,22,24: Plain weave
18 X 14		1.2 X 25m	
22 X 22			White,Blue,Green,etc.
24 X 24			



Fiberglass Window Screening

Mesh	Wire Gauge	Width(m)
14 X 14		0.61, 0.71, 0.76, 0.91, 0.91, 1.0, 1.22, 1.52, 1.83, 2.0, 2.2-2.7
16 X 16	BWG31	
16 X 14	BWG32	
18 X 14		
18 X 16		


Hardware, Tools & Machinery





WB6400

Load Capacity(Kg)	130
Water Capacity(L)	65
Sand Capacity(CBF)	5
WHEEL	14"X4 Solid or 14"X4 Air
L/H/C/A/B/h	1430x515x527 x830x680x250




WB3800

Load Capacity(Kg)	100
Water Capacity(L)	60
Sand Capacity(CBF)	4
WHEEL	13"X3 Solid
L/H/C/A/B/h	1380x540x450 x835x620x330



WB5206

Load Capacity(Kg)	100
Water Capacity(L)	65
Sand Capacity(CBF)	5
WHEEL	12"X3.5-6 AIR
L/H/C/A/B/h	1305x620x585 x830x680x250



WB6500

Load Capacity(Kg)	130
Water Capacity(L)	65
Sand Capacity(CBF)	5
WHEEL	13"X3 SOLID
L/H/C/A/B/h	1395x460x538 x820x665x250



WB5009

Load Capacity(Kg)	200
Water Capacity(L)	75
Sand Capacity(CBF)	5
WHEEL	16"X4.00-8 AIR
L/H/C/A/B/h	1440x475x500 x880x598x285



WB7400

Load Capacity(Kg)	160
Water Capacity(L)	78
Sand Capacity(CBF)	5
WHEEL	14"X4 AIR
L/H/C/A/B/h	1420x440x520 x895x642x298



WB1200

Load Capacity(Kg)	200
Water Capacity(L)	50
Sand Capacity(CBF)	4.5
WHEEL	16"X4.00-8 AIR
L/H/C/A/B/h	1465x580x555 x915x715x200



WB6414T

Load Capacity(Kg)	160
Water Capacity(L)	72
Sand Capacity(CBF)	5
WHEEL	16"X4 AIR
L/H/C/A/B/h	1405x580x600 x875x595x285



WB6404H

Load Capacity(Kg)	200
Water Capacity(L)	72
Sand Capacity(CBF)	5
WHEEL	16"X4.00-8 AIR
L/H/C/A/B/h	1390x680x583 x875x595x285



Adjustable Steel Prop(Light Duty Prop - Spanish Prop)

Min Height	Max Height	Inner tube	Outer tube	Tube Thk
0.6m	1.1m	40mm	48mm	1.4-2.5mm
0.8m	1.4m	40mm	48mm	1.4-2.5mm
1.6m	2.9m	40mm	48mm	1.4-2.5mm
1.8m	3.2m	40mm	48mm	1.4-2.5mm
2.0m	3.6m	40mm	48mm	1.4-2.5mm
2.2m	4.0m	40mm	48mm	1.4-2.5mm

Adjustable Steel Prop(Light Duty Prop - Italian Prop)

Min Height	Max Height	Inner tube	Outer tube	Tube Thk
1.6m	2.9m	48mm	56mm	1.4-2.5mm
1.8m	3.2m	48mm	56mm	1.4-2.5mm
2.0m	3.5m	48mm	56mm	1.4-2.5mm
2.0m	3.6m	48mm	56mm	1.4-2.5mm
2.2m	4.0m	48mm	56mm	1.4-2.5mm

Adjustable Steel Prop(Heavy Duty Prop - Middle East Prop)

Min Height	Max Height	Inner tube	Outer tube	Tube Thk
1.6m	2.9m	48mm	60mm	1.4-4.0mm
1.8m	3.2m	48mm	60mm	1.4-4.0mm
2.0m	3.5m	48mm	60mm	1.4-4.0mm
2.0m	3.6m	48mm	60mm	1.4-4.0mm
2.2m	4.0m	48mm	60mm	1.4-4.0mm
3.0m	5.0m	48mm	60mm	1.4-4.0mm
3.5m	6.0m	48mm	60mm	1.4-4.0mm

Tripod (Can be customized accordingly)

6.8 kg	7.45 kg	8.4 kg
--------	---------	--------



Shovels



Forks




Hammer



Axe



Rakes

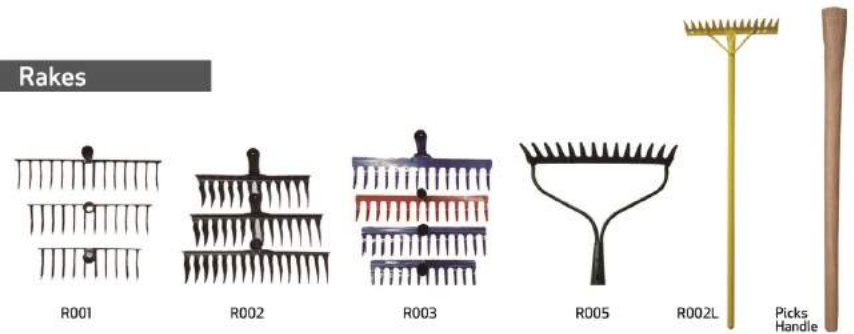

Hoe



Pickaxe



Machete



Deformed Bar/Rebar Machine



828 Glazed Tile Roll Forming Machine



Knitted Wire Mesh Machine



Nails Making Machine



Barbed Wire Machine



QTJ4-26 Brick Making Machine



Chain Link Fence Machine



Wire Drawing Machine



Fine Wire Drawing Machine



Soft Broom Machine



Concrete Batch Plant



Plant Design And Build



Corrugated Machine



Steel Strapping Wire /Steel Packing Strip
(Painted / Blue / Bright)



Standard	Steel grades	Specification: thickness X width
AISI ASTM BS DIN GB JIB	Q195 Q235 345B 20MnSi	BWG28X3/8", 1/2", 5/8" (0.36mmx9.5mm, 12.7mm, 16mm)
		BWG27X3/8", 1/2", 5/8" (0.40mmx9.5mm, 12.7mm, 16mm)
		BWG26X1/2", 5/8", 3/4" (0.45mmx12.7mm, 16mm, 19mm)
		BWG25X1/2", 5/8", 3/4" (0.50mmx12.7mm, 16mm, 19mm)
		BWG24X1/2", 5/8", 3/4" (0.55mmx12.7mm, 16mm, 19mm)
		BWG23X1/2", 5/8", 3/4" (0.60mmx12.7mm, 16mm, 19mm)
		BWG22X3/4", 1", 1 1/4" (0.70mmx19mm, 25.4mm, 32mm)
		BWG21X3/4", 1", 1 1/4" (0.8mmx19mm, 25.4mm, 32mm)
		BWG20X3/4", 1", 1 1/4" (0.9mmx19mm, 25.4mm, 32mm)
		BWG19X3/4", 1", 1 1/4" (1.0mmx19mm, 25.4mm, 32mm)

Link Chain



Link Specification				Test	Breaking	Net Wt Per	
D	L	M		Load	Load	200Ft(Kg)	
IN	MM	MM	MM	KG	KG	B.F.	H.D.G
1/8	3.2	23	12	200	400	10.4	10.7
5/32	4	27	15	300	600	16.6	17.5
3/16	4.7	31	17	400	800	22.4	23.3
7/32	5.5	32	19	550	1100	32	33
1/4	6.35	33	21	750	1500	43.5	44.8
5/16	7.94	48	31	1200	2400	68	70
3/8	9.5	60	37	1700	3400	96	99
7/16	11.11	71	41	2300	4600	126	129
1/2	12.7	85	48.5	3000	6000	167	172
5/8	15.8	114	61.5	4700	9400	256	264
3/4	19	125	75	6800	13600	381	392
7/8	22.2	140	88	9250	18500	527	543
1	25.4	155	100	12510	24300	696	716

Racking / Shelves(Customized Dimension)




Brush &
Decorative Material



Paint Brush



Roller Brush



SPC Floor

Raw material is 100% environment protection

SPC floor is mainly made with calcium powder, Resin and a kind of stabilizer, which is 100% environmental protection floor without any hazardous substance, like heavy metal & formaldehyde.



Raw materials 100% environment protection Waterproof Fireproofing & Retardant



Super Wear-Resistant Sound-Absorptive & noise-Proof Heat Conduction & Warmth-Keeping

Click: Unilin

Size	Wear Layer mm	0.3mm Wear Layer Price	0.5mm Wear Layer Price	M2/20FCL
184x1220x3.2	0.2/0.3	USD8.95/M2		3704
184x1220x4.0				2963
184x1220x4.5	0.5/0.7	USD9.57/M2		2700
184x1220x5.0				2469
184x1220x5.5				2222
184x1220x6.0				1616

1.0mm l xpe Underlay Usd0.93/M2 1.5mm l xpe Underlay Usd1.10/M2



SPC Flooring Grain



Thickness: 5mm, 6mm, 6.5mm, 7mm, 7.5mm, 8mm, 8.5mm, 9mm, 9.5mm, 10mm, 12mm


Surface Treatment: Printing, Hot Stamping, Lamination

Application: Interior Ceiling Decoration

Function: Fireproof, Heat Insulation, Moisture-Proof, Mould-Proof, Smoke-Proof, Sound-Absorbing, Soundproof, Waterproof

Item	PVC Content	Width	Length	Weight
PVC Ceiling Panel	40%, 45%, 50%, 55%, 60%, 65%, 70%	20cm/ 25cm/30cm	5.8meter Or As Requirement	1.6-3.6kg/m2
PVC Square Ceiling		59.5cm X 59.5cm 60cm X 60cm 60.3cm X 60.3cm		
PVC Panel for wall		30cm/ 40cm		

PVC Ceiling Panel

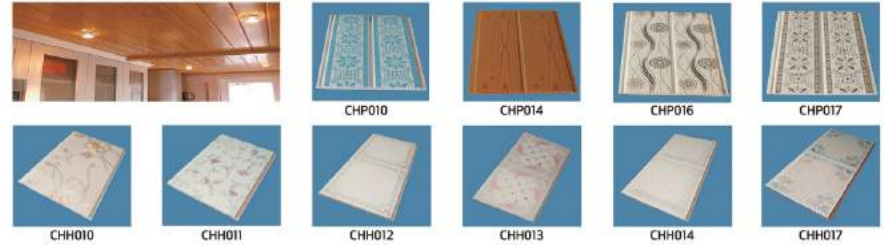

PVC Square Ceiling



PVC Panel for wall



Brush & Decorative Material


3D Self-Adhesive Wall Sticker

Design:

- * Brick design (single brick/marble brick/ Retro brick/culture stone/oblique brick)
- * Wood design (single wood/mix wood)
- * Soft leather

Installation: Self-adhesive

Type	Wall Coating
Model Number	PE foam wall panel
Function	Waterproof, Moisture-Proof, Smoke-Proof, Soundproof, Sound-Absorbing, Heat Insulation
Material	PE foam/ Soft Leather
Size	70cm*77cm/70cm*70cm
Thickness	5mm/7mm/11mm
Surface	3D Surface

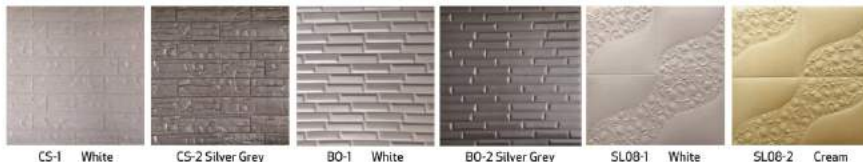

Brush & Decorative Material

Glass Block

Features:

- Environmental Friendly
- Easy Install And Maintain
- Amazing Color Range And Design
- Stable Chemical Performance
- Outstanding Transparency
- 3-Years- Long Warranty

Shape	Flat
Structure	Hollow
Technique	Clear Glass
Material	Normal Glass
Color	Transparent
Surface	Gloss
Size	80mmx190mmx190mm
Weight	2.3 Kgs/Pc
Packing	6pcs/Carton,1530Carton /20FCL
Function	Decorative Glass





Ceramic Wall Tiles


Size	200X300X6.3mm
Weight	Gross 15kgs/ctn
Packing	25pcs/ctn,1800ctns/20'fd

White Color Steel Door



Steel thickness	26 gauge	
Core	Poly foam	
Height	80"	
Thickness	45mm	
Packing	1pcs/carton, 746pcs/40HQ	
Size	Width 35" (910mm)	Width 34" (863mm)
	Width 32" (813mm)	Width 30" (762mm)

End Table / TV Cabinet / Chair

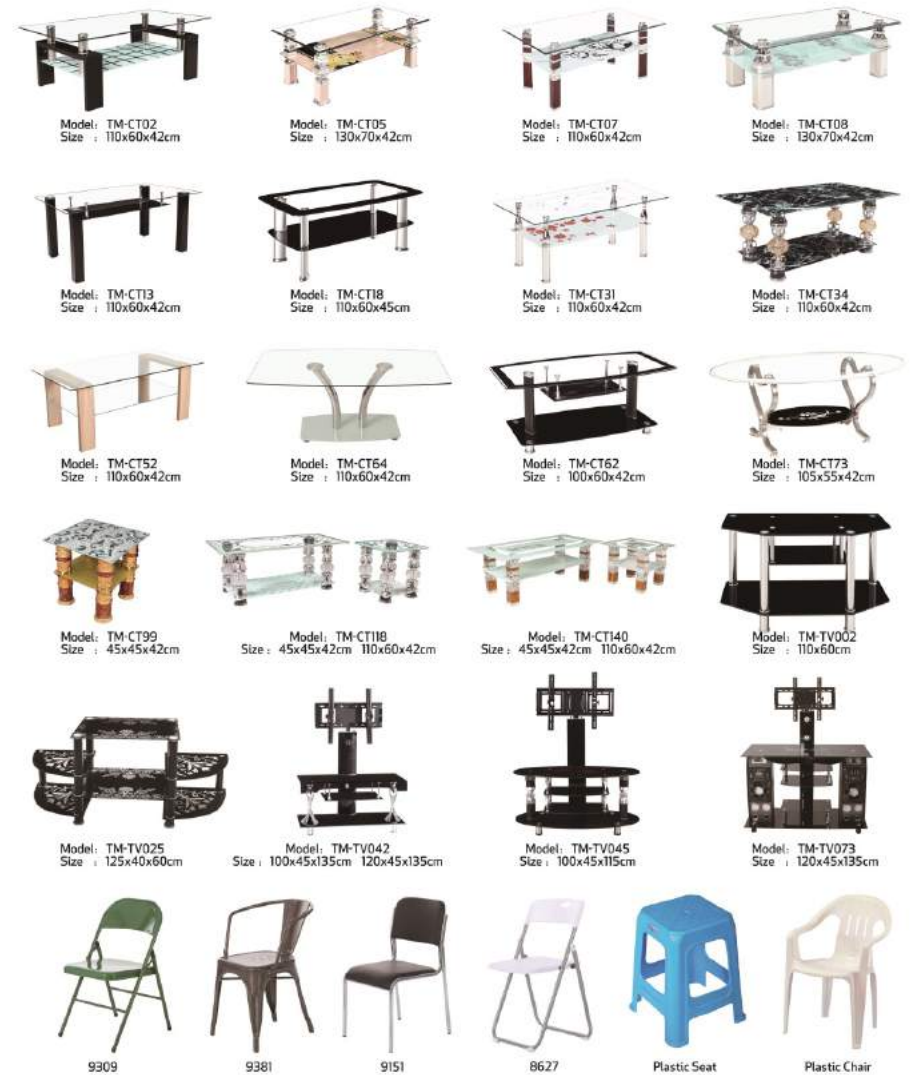

Lighting & Kitchenware



Lighting & Kitchenware



235 Hurricane Lantern

Height	24.5cm
Bottom Diameter	11.5cm
Material	Metal And Glass
Fuel	Kerosene Oil
Weight	320g



90 Hurricane Lantern

Height	34cm
Bottom Diameter	19.5cm
Material	Metal And Glass
Fuel	Kerosene Oil
Weight	820g



D80 Hurricane Lantern

Height	38cm
Bottom Diameter	19.5cm
Material	Metal And Glass
Fuel	Kerosene Oil
Weight	870g



Alkaline Battery

Types	Jacket	Discharge (3.9ohm, 24h/d, Till 0.9v)	Packing	Bottom/Top
R6C Aa	Stick-Label Jacket	55mins	4pcs/Shrink, 2 Doz/Box, 100doz/Ctn	Metal Top Metal Bottom
R20C D	Stick-Label Jacket	310mins	2pcs/Shrink, 1 Doz/Box, 24 Doz/Ctn	Metal Top Metal Bottom





Clear Bulbs / Frosted Bulbs

Voltage(v)	Wattage(w)	Lamp-Socket	Lifetime(Hours)	Package pcs/ctn	Carton size(cm)
110-220V	25-100W	E27/B22	1000	1000	53*27*200

LED Bulbs

Power	Real Power	Voltage	Base Screw Type	Lamp Bead Type	Qty Pcs/Ctn	Ctn Size (cm)			Cbm Ctn (m ³)	Gw/Ctn (kg)	Pcs 40Hq	Fob Qingdao
						L	W	H				
5W	2.2W	220V	E27	S730	100	25.5	25.5	39.5	0.026	3.5	264700	0.274 USD/PC
7W	4.5W	220V	E27	S730	100	31	31	45.5	0.044	5.2	155500	0.326 USD/PC
9W	4.5W	220V	E27	S730	100	31	31	45.5	0.044	5.2	155500	0.326 USD/PC
13W	5.2W	220V	E27	S730	100	35.5	35.5	51	0.064	6.3	105700	0.378 USD/PC
18W	6.8W	220V	E27	S730	100	39.5	39.5	55.5	0.087	8	78500	0.42 USD/PC
21W	6.8W	220V	E27	S730	100	39.5	39.5	55.5	0.087	8	78500	0.42 USD/PC
28W	8.0W	220V	E27	S730	50	50	50	35	0.088	6.6	38850	0.63 USD/PC



LED Ceiling Light / Lamps

Watt	Real Watt	Lumens Lm	Color Temperature	Lamp Bead	Driver	Base/Top (mm)	Voltage	Qty/Ctn (Pcs)	Color Box Size (mm)	Carton Size (mm)	Loading Qty 40hq
12W	10W	550	6000K	12	Non-Isolation	230/270	220V	40	270*270*65	670*540*550	13600
18W	15W	780	6000K	18	Non-Isolation	300/340	220V	24	340*340*65	700*690*415	7920
24W	18.5W	980	6000K	24	Non-Isolation	350/380	220V	20	380*380*65	710*390*785	6168

LED Bulbs / LED Lamps

Material: Plastic (PBT) and Aluminum
Wide Beam Angle Up To 220°
High Efficacy And Long Lifetime

Voltage(V)	Wattage	Lumen	Emitting Color	LED Type	Size mm
85-265V	5	600lm	Cold White	SMD2835 X 7PCS	Φ60X110
85-265V	7	800lm		SMD2835 X 9PCS	Φ60X118
85-265V	9	1000lm	White	SMD2835 X 11PCS	Φ60X125
85-265V	12	1350lm	Warm White	SMD2835 X 14PCS	Φ65X132
85-265V	15	1650lm		SMD2835 X 18PCS	Φ70X132



Rechargeable Magic Led Bulbs

Built-In Battery
Turn On & Off The Bulbs From The Light Switch
Connect Bulbs To Electricity To Charge, Charge Time 8h
Screw The Bulb To The Bulb Holder To Hang It Anywhere
High Efficacy And Long Lifetime

Voltage(V)	Wattage	Emitting Color	LED Beads	Box Size mm	Material
85-265V	10	6500K	SMD2835	79X79X145	PBT+
85-265V	12	6500K	SMD2835	79X79X145	Aluminum
85-265V	15	6500K	SMD2835	79X79X145	



Rechargeable Magic Led Bulbs

Built-In Battery
Turn On & Off The Bulbs From The Light Switch
Connect Bulbs To Electricity To Charge, Charge Time 8h
Screw The Bulb To The Bulb Holder To Hang It Anywhere
High Efficacy And Long Lifetime

Voltage(V)	Wattage	Emitting Color	LED Beads	Box Size mm	Material
85-265V	7	6500K	SMD2835	73X73X135	PBT+
85-265V	9	6500K	SMD2835	73X73X135	Aluminum
85-265V	12	6500K	SMD2835	73X73X135	



Stainless Two Burner Gas Stove

- *Cast Iron Honeycomb Burner 100X100mm
- *Porcelain Enamel Grill
- *Plastic Black Switch Knob
- *Electronic Ignition
- *Item Size: 71X37X8.5cm
- *Packing Size: 72X39X9.6cm 1100Pcs/20' 2550Pcs/40'HQ



Stainless Three Burner Gas Stove

- *Casting Iron Honeycomb Burner 100x100mm
- *Porcelain Enamel Grill
- *Plastic Black Switch Knob
- *Electronic Ignition
- *Item Size: 71X37X8.5cm
- *Packing Size: 72X39X9.6cm 1100Pcs/20' 2550Pcs/40'HQ



Four Burner Gas Stove

- *Half Cover
- *White Coating Metal Body
- *Polished Aluminum Base With Brass Cap
- *Chrome Plating Grill
- *Plastic White Switch Knob
- *Manual Ignition
- *Item Size: 50X49X13.5cm
- *Packing Size: 55X50X15cm 720Pcs/20' 1700Pcs/40'HQ

Kerosene Stove (Enamel)



Kerosene Stove (Painted)



Kerosene Stove (Spraying Plastics)



Gas Tanks / Stove / Valves



3KG

Water capacity	7.2L/6.6L
Height	295mm
Diameter	210mm
Weight	4.0kg/3.4kgs



5KG

Water capacity	12L
Height	363mm
Diameter	232mm
Weight	5.0kg



3KG

Water capacity	7.2L
Height	274mm
Diameter	230mm
Weight	4.1kg



5KG

Water capacity	12L
Height	366mm
Diameter	250mm
Weight	5.5kg



6KG

Water capacity	13L
Height	295mm
Diameter	300mm
Weight	7.5kgs



12.5KG

Water capacity	26.5L
Height	590mm
Diameter	300mm
Weight	14kg



6KG

Water capacity	14.4L
Height	315mm
Diameter	300mm
Weight	7.8kg



12.5KG

Water capacity	26.5L
Height	498mm
Diameter	300mm
Weight	12.6kg



50LBS

Water capacity	48L
Height	837mm
Diameter	314mm
Weight	21kgs



100LBS

Water capacity	108L
Height	1110mm
Diameter	400mm
Weight	42.5+/-1.5kgs



Camping Burner Long



Camping Burner Short



Gas Regulator 1



Gas Regulator 2



Valve 1



Valve 2



Valve 3



Valve 4

Lighting & Kitchenware



Toilet Tissue Paper

Material	Virgin Wood Pulp/Recycled Pulp/Mixed pulp
Layer	1/2/3/4/5 ply
Surface	Plain/ Dot Embossed
Weight	80G/100G/120G/150G or as required
Color	Natural White
Core	Inner Core or no Core
Sheet Size	100 X 130MM or as required
Roll Size	100 X 100MM or as required
Packing	10/12 roll/bag



Steel Scourer

Item	Material	Weight	Packing
Stainless Steel Scourer	Stainless 410,430	10G/PCS-50G/PCS	Plastic Bag Woven Bag Blister Card
Galvanized Steel Scourer	Galvanized Wire		



NO.	Size	Material	Outer dia (top)	Height	Dia (bottom)	Top dia With handle	Weight	Thickness
A010110	47.5#	GALVANIZED	47.5cm	13.5cm	21cm	59cm	1.4kg	0.6mm
A010109	47.5#	GALVANIZED	47.5cm	13.5cm	21cm	59cm	1.6kg	0.7mm
A010108	47.5#	GALVANIZED	47.5cm	13.5cm	21cm	59cm	1.7kg	0.8mm
A010210	46.5#	GALVANIZED	46.5cm	14cm	22cm	58cm	1.6kg	0.7mm



707

752

768


303

751

753

Charcoal Iron

Material	Cast iron
Parts	main case, supports, lid cap, handle, cockscomb switch, plate,screw,rivet
Handle	wooden(or as customer's requirement)
Weight	1.7kg,1.8kg,1.9kg,2.0Kg,2.25kg
Inner box	brown box
Brand	cock,peacock,double thomb
Packing	1 pc/box, 6 boxes/carton,12 boxes/carton (or as the buyer requirement)

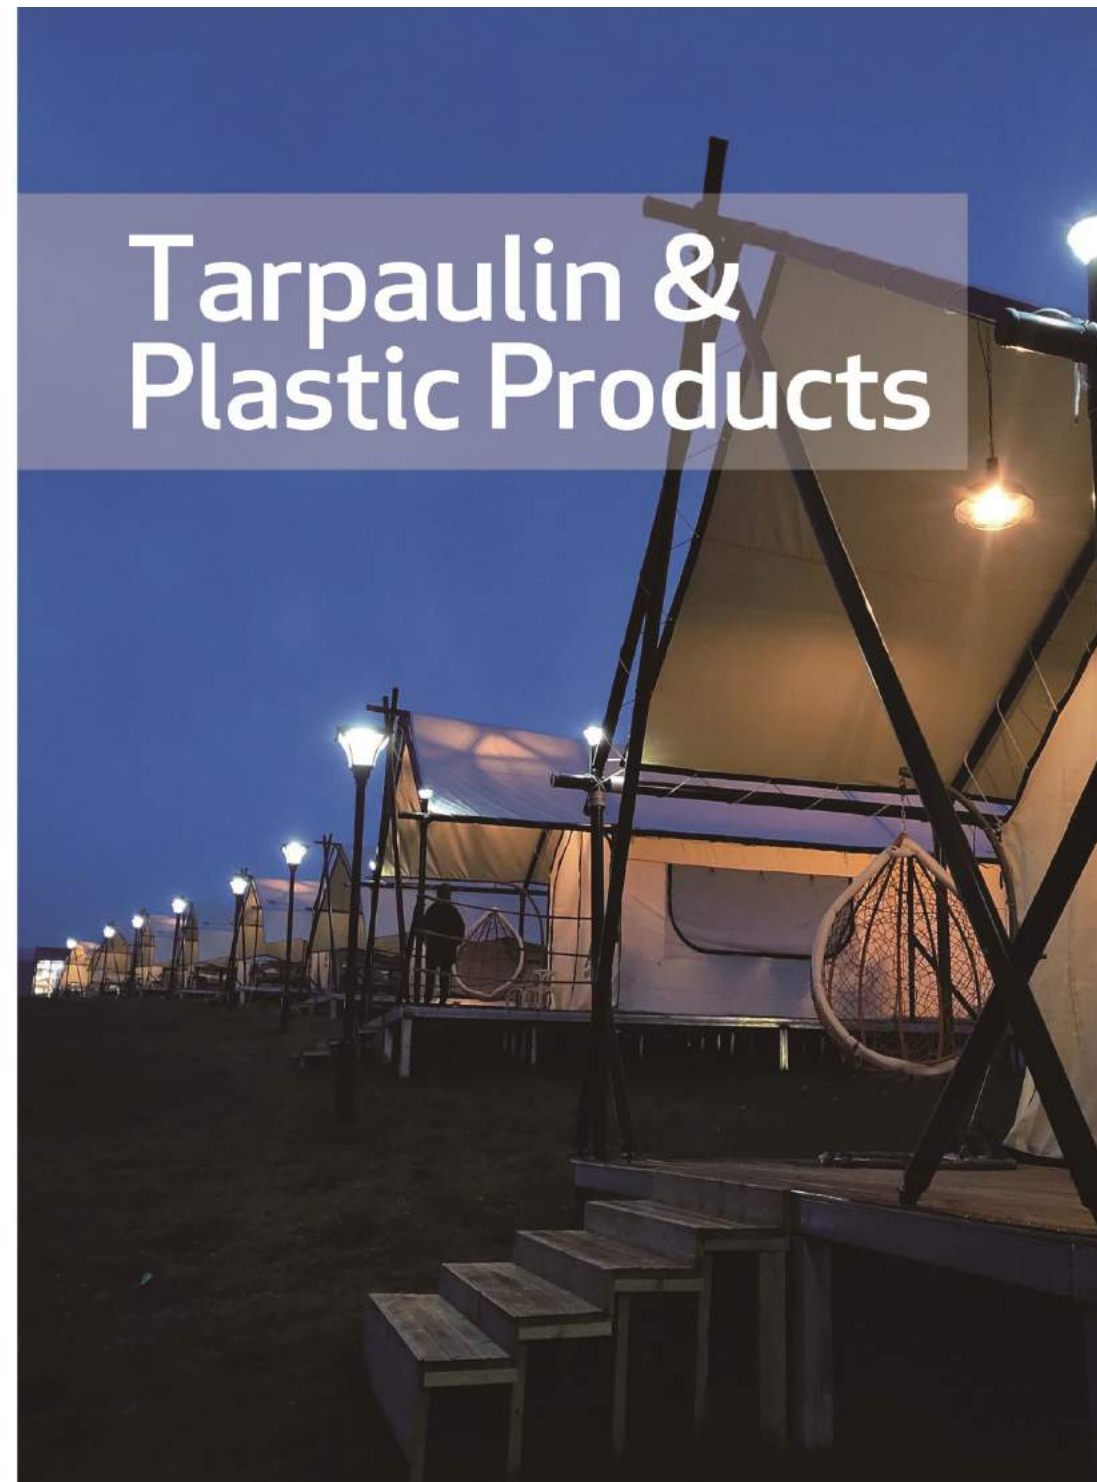


Tarpaulin & Plastic Products






PE Tarpaulin

Material	HDPE woven + LDPE OR PP laminating on both sides
Gsm	50-390g/sqm
Yarn Count	500D-2400D etc.
Woven Density	6X6,7X6,7X7,8X8,10X8,10X10,12X12,14X14,16X16
Width	1.83m,2m,3.66m,4m or any size with Joint
Length	As request
Color	Green , White , Blue , Silver , Blue White , Blue Silver , Blue Orange etc.

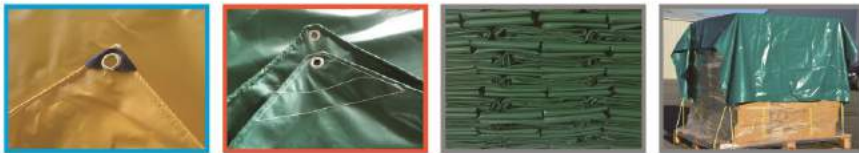

PVC Tarpaulin / Fumigation Sheet

Material	PVC
Gsm	450gsm-800gsm
Yarn Count	200D,300D,500D,840D,1000D,Etc
Woven Density	9*9,14*14,18*12,20*20,ETC
Width	1.5m-2.05m
Length	According To Request
Color	Green/White/Blue/Yellow/Red(Customized)

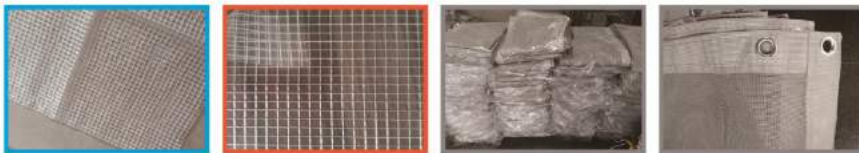

Net Mesh Tarpaulin

Material	100% Polyester, HDPE,LDPE
Gsm	70-300gsm
Yarn Count	200D, 300D, 500D, 840D, 1000D, 1300D
Woven Density	As request
Width	1.5m-2m, wider is ok if welding acceptable
Length	As request
Color	According to sample, or Pantone, RAL color Chart

Helmet



Shell	ABS+
Suspension	4 Points Plastic Or Textile Straps
Single Net Weight	465g
Adjuster	Pin Lock Or Ratchet
Chin Strap & Sweatband	Available
Color	Multi-Color Select-able (Red/White/Blue/Yellow)
Function	Anti-Shock & Puncture
Application	Construction & Industry
Standard	EN 397, GOST 12.4.207-99, ANSI/ISEA Z89.1-2009 CLASS G, ETC

188V/PE/217G



玻璃钢C / FRP C/ABS/341g



玻璃钢钉/FRP N/ABS/382g



玻璃钢钉烤漆/FRP NP/FRP /392g



高级旋钮V型/V KNOB/ABS/372g



国标V型/GB V/PE+/276g



国检V型/GJ V/ABS+/372g



加厚V型/V+/ABS/313g




加厚透气V型/V+B/ABS/310g



小V/SV/PE/154g





JW-013

Nine Stents Flat Pallet

Standards	1000X800X140mm 1200X800X140mm 1200X1000X140mm	1000X1000X140mm 1100X1000X140mm 1200X1200X145mm
dynamic load		1T
Static load		1T
Goods shelf		X



JW-016

“川” Type Pallet

Standards	1000X800X150mm 1000X1000X150mm 1200X1000X150mm 1300X1100X150mm	1200X800X150mm 1100X1100X150mm 1200X1200X150mm
Remarks	Addible 4-8 steel tubes	
dynamic load		1T
Static load		2T
Goods shelf		✓



JW-017

“田” Type Pallet

Standards	1000X800X150mm 1100X1100X150mm 1200X1200X150mm	1000X1000X150mm 1200X1000X150mm 1300X1100X150mm
Remarks	Addible 4-7 steel tubes	
dynamic load		1T
Static load		2T
Goods shelf		✓



JW-018

“田” Type Packaging pallet


Standards	1100X1100X120mm	1200X1000X150mm
dynamic load		0.5T
Static load		1T
Goods shelf		✓



JW-021

Double-faced Pallet

Standards	1100X1100X150mm 1200X1200X150mm	1200X1000X150mm 1400X1200X150mm
dynamic load		2T
Static load		4T
Goods shelf		✓



JW-022

Blow Molding Nine Stents pallet

Standards	1200X1000X140mm	1100X1100X140mm
dynamic load		1T
Static load		2T
Goods shelf		X



JW-025

Moisture Proof Storage Underboarding

Standards	1000X600X40mm	900X300X25mm
-----------	---------------	--------------



JW-070

Freeze Basket

Standards	OD 590X420X150mm	ID 560X380X135mm
-----------	------------------	------------------



JW-101

New 3.6 Weight Fruit Basket

Standards	OD 535X365X310mm	ID 500X325X300mm
-----------	------------------	------------------



JW-137

Fruit box

Standards	OD 555X350X285mm	ID 520X320X270mm
-----------	------------------	------------------



JW-200

Supermarket basket (large pullrod)

Standards	OD 610X420X450mm
-----------	------------------



JW-199

Cereal Bucket

120L	OD 480(DIA)X480mm
80L	OD 430(DIA)X450mm



JW-002

Plastic dustbin

Standards	360L (1100X850X700mm)
	240L (1020X597X740mm)
	120L (930X470X570mm)
	100L (805X492X542mm)
Colour	■ ■ ■ ■ ■ ■ ■ ■



Garden Hose

NO.	SPEC	Wall thickness mm	Maximum length m	weight
2914	Φ14	2.0	100	12/roll
2916	Φ16	2.0	50	7.5/roll
2920	Φ20	2.0	50	9/roll
2922	Φ22	2.0	50	10/roll
2925	Φ25	2.0	50	11/roll
2932	Φ32	3.0	50	17/roll

PP Woven Bag



Product	PP Woven Bag
Material	55-120GSM PP Woven Fabric
Length	As The Customer's Request
Width	20-60CM As Request
Mesh	10 X10 To 12 X 12
Top	Heat & Cold Cut Or Hemmed
Bottom	Single/Double Folded, Single/Double Stitched
Lamination	OPP Lamination Or PE Lamination
Printing	Offset Printing, Full Color(OPP) Printing
Color	CMYK Or As Artwork
Loading Weight	As Request
Packing	500Pcs/Bale, 1000Pcs /Bale
Quantity	20FT:12 Ton, 40FT:26 Ton
Customized	DEM & ODM Are Welcomed
Suitable For	Animal Food, Fertilizers, Flour, Cereal, Coffee Beans, Foodstuffs, Salt, Powdered And Granular Goods, Plastic Resins And Construction Materials...

OPP Packing Tape



Material	Polypropylene BOPP OPP Film, coated with water based acrylic adhesive, solvent adhesive, hot melt adhesive
Thickness	Normal: 40mic, 45mic, 48mic, 50mic etc., or as required
Width/Length	Normal Width: 45mm, 48mm(Africa), 50mm, 72mm etc., or as required, Normal Length 50m, 66m, 100m, 30y, 100y, 300m, 500m, 1000y etc. Length: HS 39191010, 1YARD=0.9144M
Color	Clear, transparent, crystal clear, brown, colorful etc., or as required
Packaging	6rolls/shrink, 36rolls/carton, 48rolls/carton 72rolls/carton.

Exercise Book




Size	A4 A5, 16.5*21.5cm, 16*21cm, 16*22cm, 17*22cm, 18*24cm..... Or Requested.
Cover Material	128/157/180gsm...Art Paper
Cover Printing	4 Colors-CMYK Printing Custom Notebook
Inside Paper	55/60/65...Grams Offset Paper; 48/50/52/55...Grams Writing Paper Or Recycled Paper.
Inside Printing	Different Designs With Flexographic Printing And Offset Printing
Inside Sheet	24/48/96/100...Sheets
Binding	Stapling Binding/Glue Binding
Packing	Inside: Shrink Bag Outer: 5-Ply Corrugated Carton With High Quality, Colored Printing Available.



Math Set



Chalk



Glass Ball Marbles



Poker



Shelf Bracket



Welding Rod



Bolts and Nuts



Solar Panel



Pipe and Fitting



PVC Pipe



Stretch Film



PE film



Stainless & Brass Locksets



Padlocks



Door Bolt



Watering Can



Butt Hinges



Cabinet Hinges



Combination Wrench



Flap Disc



Baby Pants



Baby Diapers



Folding Bed



Candle