

SINCE 2005
ONE STOP PURCHASING

2023-2025

PPGI/GI Coils/Roofing Tiles CATALOGUE



Shandong Lala Metal Products Co.,Ltd

Add: Rm1103, A10Building,Lushang Center,Guangzhou Road,

Lanshan District,Linyi City,Shandong Province,China

Tel: +86-539-7977830

Fax: +86-539-7977830

Wechat: +8618953955575

Whatsapp: +8613705495251

Email: chunlei@sinogrp.com Http: www.sinogrp.com

www.sinogrp.com



• 办公室 OFFICE



• 彩涂卷生产线 PPGI COIL PRODUCTION LINE



• 热镀锌卷生产线
HOT DIPPED GALVANIZED COIL PRODUCTION LINE



• 样品间 Sample room

Shandong Lala Metal Products Co., Ltd. is one of the Global and leading PPGI/GI/GL coils, Stone coated roof tiles supplier in China, is well-known in the industry, and have nearly 20 years of export experience. Our main products: PPGI/PPGL/GI/GL coils, Stone coated roof tiles, Corrugated roof sheets, All kinds of Nails & Screws, GI wire, and so on. We are located in Linyi city, Shandong Province with convenient transportation access. We are Dedicated to strict quality control, thoughtful customer service, and fast delivery, our experienced staff members are always available to discuss your requirements and ensure full customer satisfaction. We also welcome OEM and ODM orders. Whether selecting a current product from our catalog or seeking engineering assistance for your application, you can talk to our customer service center about your sourcing requirements.

Our experienced 20-person sales team serves more than 200 bigger customers in more than 40 countries. we are willing to provide Chinese high-quality goods and services for all friends all over the world. We firmly believe that honesty, trustworthiness, and Win-win thinking will make your business bigger and longer.




Contents

PPGI/GI/Galvalume Steel Coils	1-5
Corrugated Roofing Sheet	6-13
Stone Coated Roofing Tiles	14-19
Nails & Screws	20-31
Wire & Wire Mesh	32-34



PACKING, LOADING PICTURES CERTIFICATE

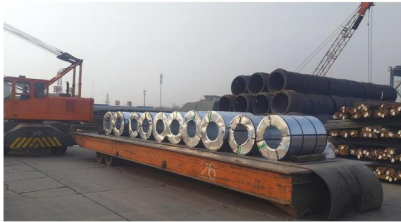


PPGI/GI/GL Coils



PPGI/PPGL Steel Coils

Material	galvanized / aluzinc steel coil, SGCC, DX51D-Z/AZ
Thickness	0.12-1.2mm
Width	<=1250mm
Color	Red, blue, white or any other RAL color
Hardness	50HRB to 90HRB
Zinc coating	40g / m2 to 275g / m2
Top / Back coating	12um to 25um/ 5um to 10um




Hot Dipped Galvanized Coils

Metal base	cold rolled steel coil
Thickness	0.11-1.2mm
Width	<=1250mm
Zinc	40-275gram / M2
Surface treatment	chromated,oiled,dry un-oiled
Spangle types:	zero / small / regular / big spangle



Galvalume Coils/Aluzinc Coils

Metal base	cold rolled steel coil
Thickness	0.12-1.2mm
Width	<=1250mm
Zinc	40-275gram / M2
Surface treatment	chromated, Anti-finger print (AFP),oiled,dry un-oiled
Spangle types:	small / regular / big spangle



Aluminum Coils


Alloy	A3003 A1100 A8011
Standard width	1200mm,1240mm,1000mm, Max width is 1700mm
ID	150mm,405mm or 505mm
Aluminum thickness	0.02mm-0.80mm



Color coated steel plate generally refers to the product of the substrate is subjected to surface treatment, an organic thin film and baking of the paint or adhesive coating(roll coating), and processing into final products. In abroad, it is known as the "pre-coated steel sheet" plastic steel plates. The products already have beautiful color or pattern when it is from the factory. It is also known as the "color-coated steel". More common in our color coated steel called and referred to as "color coated" or "color plates".




Product Performance

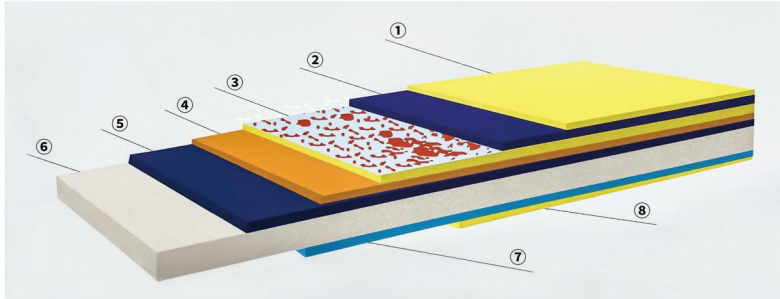

- ① Protective film
- ② Surface painting or protective film
- ③ Base painting or graphic layer
- ④ Base painting
- ⑤ Chromizing layer
- ⑥ Steel sheet
- ⑦ Chromizing layer
- ⑧ Back painting

The style of products is diverse, the pattern is paint's color after high temperature baking. Our products have the well quality of decorative and corrosion resistance of organic materials, so they are light-weight, easy molding, having the quality of pesticide resistance, strong reflex, strong anti-acid rain, strong corrosion resistance, strong temperature resistance, strong moisture resistance. The zinc coating and color coated can make the corrosive metal plate isolated from the atmosphere. The choice of coating color is suit with people's reasonable requirements of architectural modeling beautification and perfect appearance. A variety of colors for you to choose!

Product Packing

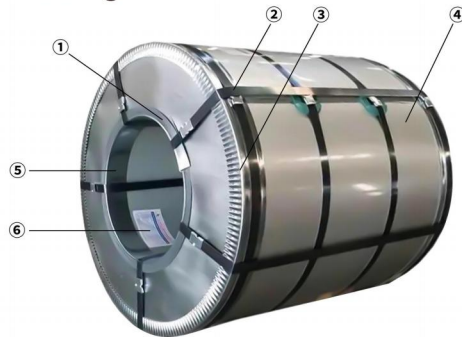

- ① Water and Rustproof Paper
- ② Metal Band Strapping
- ③ Outside Diameter Ring
- ④ Metal Protective Steel sheet
- ⑤ Metal Steel Sheet
- ⑥ Marking Sheet



Electrical and lighting equipment

Refrigerators, washing machines, switch cabinets, air conditioners, microwave ovens, bakers, freezers, fluorescent lampshades, power distribution boxes, motor boxes, etc.



Building and structural engineering

Construction industry (outdoor): corrugated roofs, rainwater pipes, balcony railings, cold storage, kiosks, etc.
Construction industry (indoor): door frame, light steel structure of house, screen, elevator, staircase, ventilation duct, etc.



Communal facilities

Bus stations, subway stations, airports, amusement parks, shopping malls, etc.



Agricultural equipment

Various vending machines, display windows, cans, compressed containers, collection rooms, etc.




Furniture and office equipment

File cabinet, lampshade, wardrobe, table, bed, wall locker, bookshelf, iron furniture, compartment, shutter, etc.



Transportation industry

Interior decoration of cars and trains, partitions, ship partition boards, air purifiers, various kinds of marine panels, oil purifiers, front panels of driver's seat, etc.



Colored Aluminum Coils

Alloy	A3003 A1100 A8011
Standard width	1200mm,1240mm,1000mm, Max width is 1700mm
ID	150mm,405mm or 505mm
Aluminum thickness	0.02mm-0.80mm

Product Application



Color Aluminium Coils For Roof And Insulation Board



Color Aluminium Coils For Home Appliances




Color Aluminium Coils For Other Usage

Packing



Corrugated Roofing Sheet







Type	FX28-207-828
Effective Width / Full Width(mm)	828/935
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX23-183-1100
Effective Width / Full Width(mm)	1100/1180
Feeding Width (mm)	1250
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX27-190-950
Effective Width / Full Width(mm)	950/1040
Feeding Width (mm)	1200
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX35-185-740
Effective Width / Full Width(mm)	740/800
Feeding Width (mm)	960
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX30-152-760
Effective Width / Full Width(mm)	760/820
Feeding Width (mm)	980
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX25-210-630
Effective Width / Full Width(mm)	630/680
Feeding Width (mm)	750
Thickness (mm)	0.2-0.8
Installation Type	




Type	FX25-210-840
Effective Width / Full Width(mm)	840/890
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	



Type	FX18-76-836
Effective Width / Full Width(mm)	836/900
Feeding Width (mm)	1000
Thickness (mm)	0.12-0.6
Installation Type	




Type	FX18-76-760
Effective Width / Full Width(mm)	760/800
Feeding Width (mm)	900
Thickness (mm)	0.12-0.6
Installation Type	




Type	FX18-76-610
Effective Width / Full Width(mm)	610/665
Feeding Width (mm)	750
Thickness (mm)	0.12-0.6
Installation Type	


Corrugated Roofing Sheet




Type	FX35-125-750
Effective Width / Full Width(mm)	750/820
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX50-410-820
Effective Width / Full Width(mm)	820/840
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	



Type	FX75-200-600
Effective Width / Full Width(mm)	600/650
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX76-150-688
Effective Width / Full Width(mm)	688/750
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX15-225-900
Effective Width / Full Width(mm)	900/940-950
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	


Corrugated Roofing Sheet




Type	FX28-205-820
Effective Width / Full Width(mm)	820/910
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX12-110-880
Effective Width / Full Width(mm)	880/900-910
Feeding Width (mm)	1000
Thickness (mm)	0.15-0.8
Installation Type	




Type	FX25-205-1025
Effective Width / Full Width(mm)	1025/1100
Feeding Width (mm)	1200
Thickness (mm)	0.15-0.8
Installation Type	

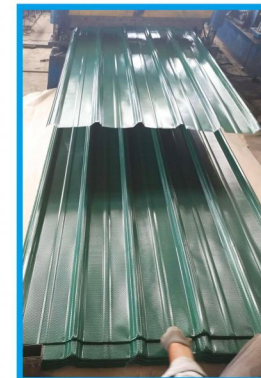





Z & C Profile



h-height
b-mid flange
a-small flange
t-thickness




h-height
b-mid flange
a-small flange
t-thickness




Ridge caps 1

Thickness	Feeding Width	Length
0.17-0.7	300mm	0.9-5.8meter



Ridge caps 2

Thickness	Feeding Width	Length
0.17-0.7	500mm	0.9-5.8meter



Ridge caps 3

Thickness	Feeding Width	Length
0.17-0.7	500mm	0.9-5.8meter



Ridge caps 1




Ridge caps 2




Ridge caps 3



Embossed Trapezoidal Color Sheet

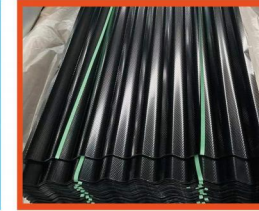

Embossed Corrugated Color Sheet

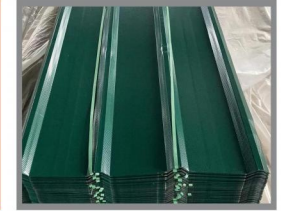


Embossed Trapezoidal Color Sheet




Kraft Paper Packing



Trapezoidal Color Sheet

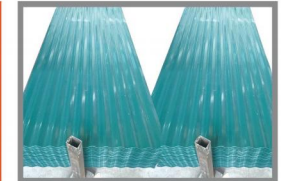

Corrugated Color Sheet

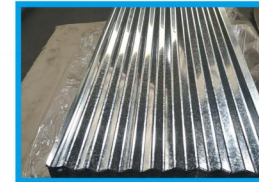

HDG Corrugated Sheet



Trapezoidal Color Sheet




Color Coated Glazed Tile



Steel Pallet Packing



Coils Fixed In Container

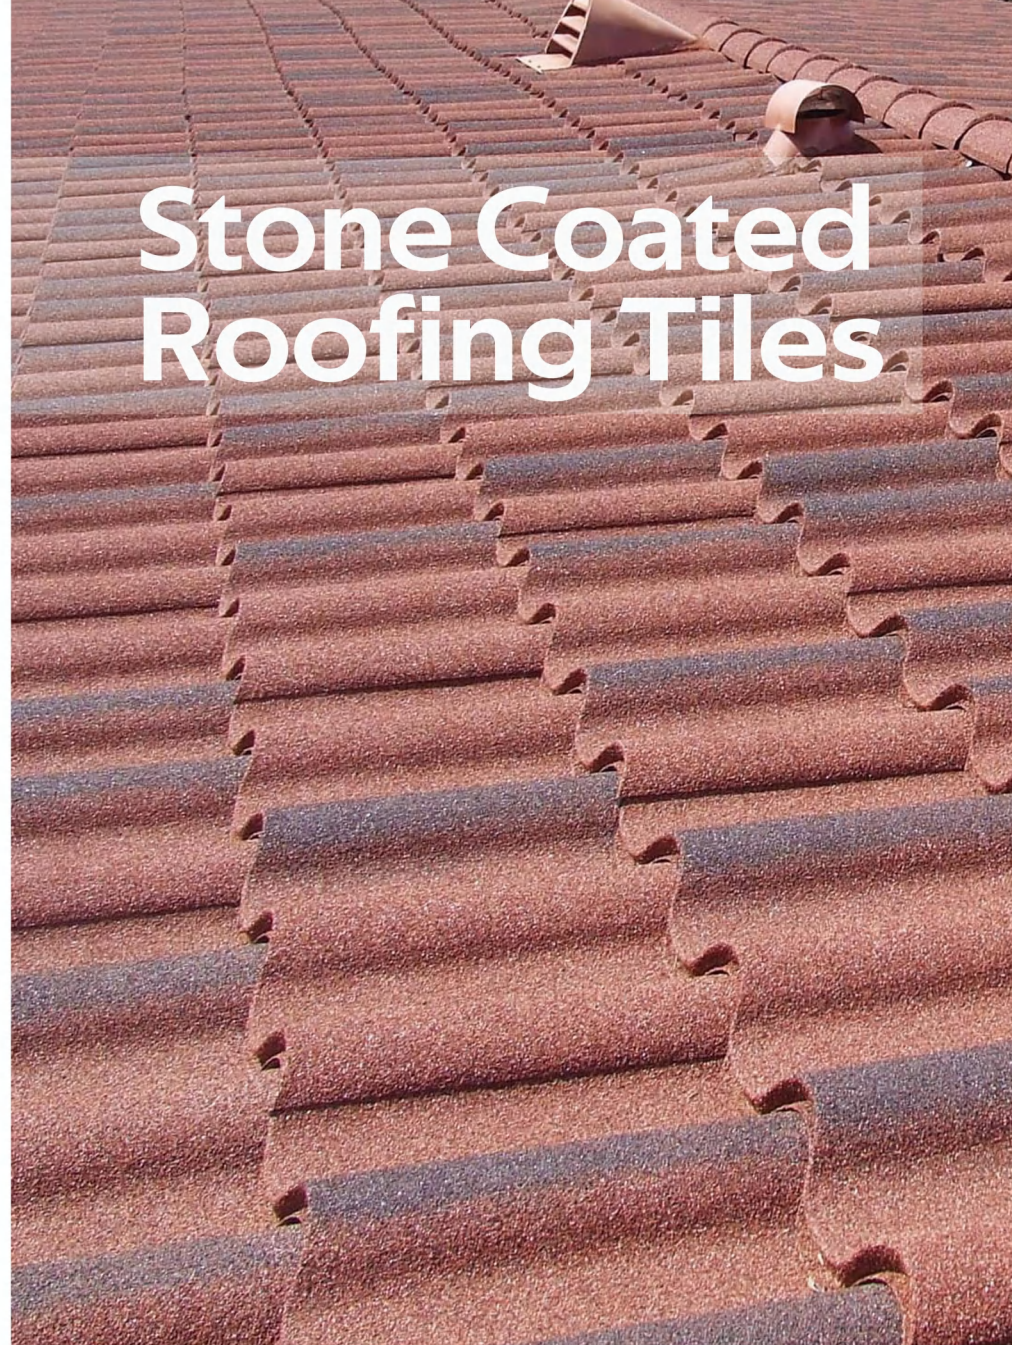

Stone Coated Roofing Tiles



Bond Tile 圆弧瓦

Thickness	0.4mm
Tiles Size	1340X420mm
Install Size	1290X370mm
Cover Area	2.08pcs/sqm
Weight	2.8kgs/pc



New Bond Tile 新圆弧瓦

Thickness	0.4mm
Tiles Size	1340X420mm
Install Size	1290X370mm
Cover Area	2.08pcs/sqm
Weight	2.8kgs/pc



Roman Tile 罗马瓦

Thickness	0.4mm
Tiles Size	1300X420mm
Install Size	1250X370mm
Cover Area	2.16pcs/sqm
Weight	2.8kgs/sheet



Romania Tile 深罗马

Thickness	0.4mm
Tiles Size	1300X420mm
Install Size	1250X370mm
Cover Area	2.3pcs/sqm
Weight	2.8kgs/pc



Shingle Tile 方格瓦

Thickness	0.4mm
Tiles Size	1340X420mm
Install Size	1290X370mm
Cover Area	2.08pcs/sqm
Weight	2.8kgs/pc




Wood Shake Tile 木纹瓦

Thickness	0.4mm
Tiles Size	1340X420mm
Install Size	1290X370mm
Cover Area	2.08pcs/sqm
Weight	2.8kgs/pc



Milano Tile 米兰瓦

Thickness	0.4mm
Tiles Size	1340X420mm
Install Size	1290X370mm
Cover Area	2.08pcs/sqm
Weight	2.8kgs/pc



Classica Tile 斜边瓦

Thickness	0.4mm
Tiles Size	1340X420mm
Install Size	1290X370mm
Cover Area	2.08pcs/sqm
Weight	2.8kgs/pc




Joint Tile 连体瓦

Thickness	0.4mm
Tiles Size	860X830mm
Install Size	830X770mm
Cover Area	1.55sheet/sqm
Weight	3.2kgs/pc



Antique Tile 仿古瓦

Thickness	0.4mm
Tiles Size	730X740mm
Install Size	650X700mm
Cover Area	2.2pcs/sqm
Weight	2.8kgs/pc



Wave Tile 波浪瓦

Thickness	0.4mm
Tiles Size	1300X420mm
Install Size	1250X370mm
Cover Area	2.33pcs/sqm
Weight	2.8kgs/pc



Scales Tile 鱼鳞瓦

Thickness	0.4mm
Tiles Size	610X215X0.4mm
Cover Area	12pcs/sqm
Weight	0.5kgs/pc




Slate Tile 石纹瓦


Thickness	0.4mm
Tiles Size	1300X420X0.4mm
Install Size	1290X370X0.4mm
Cover Area	2.16pcs/sqm
Weight	3kgs/pc

Accessories 主要配件


Angle Ridge Cap I 角型脊瓦1




Angle Ridge Cap II 角型脊瓦2




Square Ridge Cap 方型脊瓦




Wall Side Flashing 泛水板




Valley Tray 天沟




Circular Ridge Cap 圆弧脊瓦

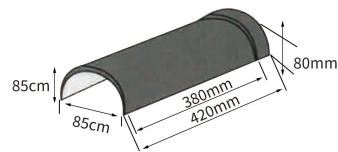


Barge Board Cover 山墙板




Flat Board 平板



Facial Board 檐口板



Installation Instruction

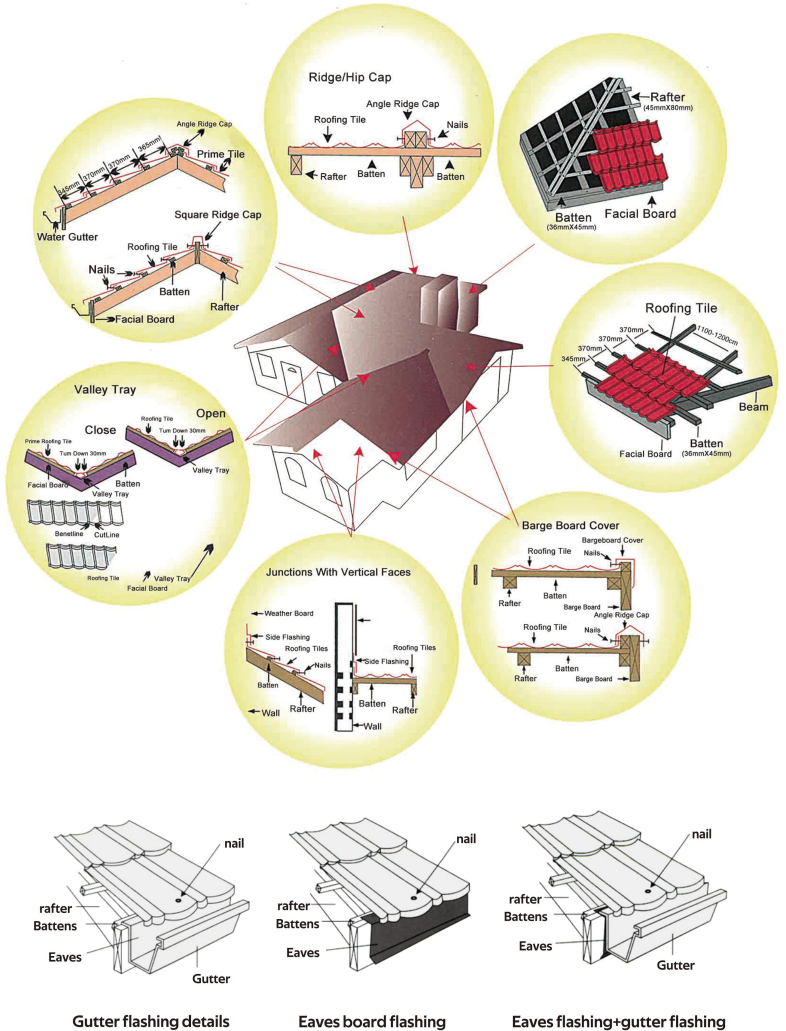



Shingle Tile 方格瓦



Makuti Grained Tile 木纹瓦



Modern Classical Tile 斜边瓦



Wave Tile 波浪瓦



Deep Rome 深罗马



Classical Tile 圆弧瓦



Rainbow Tile 彩虹瓦



Joint Tile 连体瓦



Antique Tile 仿古瓦



Scales Tile 鱼鳞瓦



Shingle Tile 方格瓦




Milano Tile 米兰瓦

Nails & Screws




Common Wire Nails, Checkered Countersunk Head

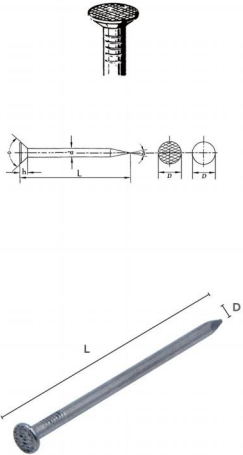

SIZE	LENGTH	DIAMETER	KG/1000 PCS	PCS/1KGS
INCH X BWG	MM	MM		
3/8X20	9.52	0.89	0.046	21730
1/2X19	12.70	1.07	0.088	11360
5/8X18	15.87	1.25	0.152	6580
3/4X17	19.05	1.47	0.25	4000
1X16	25.40	1.65	0.42	2380
1-1/4X15	31.75	1.83	0.65	1540
1-1/2X14	38.10	2.11	1.03	971
1-3/4X13	44.45	2.41	1.57	637
2X12	50.80	2.77	2.37	422
2-1/2X11	63.50	3.05	3.58	279
3X10	76.20	3.40	5.35	187
3-1/2X9	88.90	3.76	7.65	131
4X8	101.66	4.19	10.82	92.4
4-1/2X7	114.30	4.57	14.49	69.0
5X6	127.00	5.16	20.53	48.7
6X5	152.40	5.59	28.93	34.5
7X4	177.80	6.05	40.32	24.8

Finishing Nails, Brad Head



Size	Length Inch	D ASWG
2D	1	16-1/2
3D	1-1/4	15-1/2
4D	1-1/2	15
5D	1-3/4	15
6D	2	13
8D	2-1/2	12-1/2
9D	2-3/4	12-1/2
10D	3	11-1/2
12D	3-1/4	11-1/2
16D	3-1/2	11
20D	4	10

Common nails all kinds of packing



BULK 25KGS CARTON



475GRAM X 25 BOX



200GRAM X 80BAGS



ITALY 5KGS X 4BOX



16BOX /CARTON



MADAGASCAR 5KGS X 4BOX



CONGO 1KGS X 20BAG



25KGS/CARTON



25KGS/BAG




KUWAIT 16BOX /WOODEN CASE




1KGS X 25BAGS



WOODEN PALLET



**Galvanized Umbrella Head Roofing Nails
Twisted Shank / Smooth Shank**




Size	D1 mm	D2 mm	L mm
8BWG	4.2	20	2",2.5",3",3.5",4"
9BWG	3.76	20	2",2.5",3",3.5",4"
10BWG	3.4	20	2",2.5",3"
11BWG	3.15	18	1.5",2",2.5",3"
12BWG	2.8	16	1.5",2",2.5"
13BWG	2.4	14	1.5",2"




**Galvanized Ring Shank Roofing Nails
With Washer, Umbrella Head**

Size	D1 mm	D2 mm	L mm
8BWG	4.2	20	2",2.5",3",3.5",4"
9BWG	3.76	20	2",2.5",3",3.5",4"



**Assembled Roofing Nails, Umbrella Head
With Washer, Screw Shank / Ring Shank**


Size	D1 mm	D2 mm	D3 mm	L mm
7BWG	4.5mm	22mm	24.5mm	3",3.5",4"
8BWG	4.2mm	22mm	24.5mm	3",3.5",4"
9BWG	3.76mm	22mm	24.5mm	3",3.5",4"



**Galvanized Roofing Nails Flat Head
Plastic Cap, Screw Shank / Ring Shank**

Size	D1 mm	D2 mm	L mm
8BWG	4.2mm	23.5mm	2",2.5",3",3.5",4"
9BWG	3.76mm	23.5mm	2",2.5",3",3.5",4"

Roofing nails all kinds of packing





Concrete Steel Nails / Masonry Nails
 Shank: Grooved Shank, Twisted Shank,
 Plain Shank, Spiral Shank, Angular Spiral Shank

Size	D mm	L inch	Material	Finish
3.0 X 1"	3.0	1"	45# or 60# carbon wire rod	E.Galvanized / Black
3.2 X 1.5"	3.2	1.5"	45# or 60# carbon wire rod	E.Galvanized / Black
3.6 X 2"	3.6	2"	45# or 60# carbon wire rod	E.Galvanized / Black
4.0 X 2.5"	4.0	2.5"	45# or 60# carbon wire rod	E.Galvanized / Black
4.2 X 3"	4.2	3"	45# or 60# carbon wire rod	E.Galvanized / Black
4.5 X 4"	4.5	4"	45# or 60# carbon wire rod	E.Galvanized / Black



J Bolt

Standard	Material	Finish	Diameter	Size
DIN	Carbon Steel	Zinc plated	5.2mm 4.9mm	2"
ASTM	Q195			2.5"
etc	Q235			3"
				3.5"
				4"



150GRAM BOX



1KGS BOX



100PCS BOX



50PCS BOX



400GRAM X 50BOXES



WOODEN PALLET

Coil Nails

Size	L mm	D inch	D mm	Pcs x Coils /carton
1-1/4"	32	0.086/0.092	2.1/2.3	350 X 40
1-1/2"	38	0.086/0.092	2.1/2.3	350 X 40
1-3/4"	45	0.086/0.092	2.1/2.3	300 X 30
2"	50	0.092/0.099	2.3/2.5	300 X 30
2-1/4"	57	0.092/0.099	2.3/2.5	300 X 30
2-1/2"	64	0.092/0.099	2.3/2.5	300 X 30
2-3/4"	70	0.099/0.113	2.5/2.8	225 X 20
3"	75	0.113/0.12	2.8/3.0	225 X 20
3-1/8"	80	0.113/0.12	2.8/3.0	225 X 20
3-1/2"	90	0.12/0.131	3.0/3.3	225 X 20
4"	100	0.131	3.3	150 X 20



Coil Nails



Carton Packing



Carton Packing




Production Line



Wooden Pallet




Shipping




Drywall Screws

(Black Phosphated, Fine/Coarse Thread)



Size	DK	D	L
(#6) 3.5	7.80-8.00	3.35-5.53	16-55
(#7) 3.9	7.80-8.00	3.73-3.90	16-70
(#8) 4.2	7.80-8.00	4.04-4.22	16-102
(#10) 4.8	8.80-9.40	4.62-4.8	16-152


Chipboard Screws



Size	Length
Φ2.5mm	10/12/16/20/25/30/35
Φ3mm	12/16/20/25/30/35/40/45/50
Φ3.5mm	12/16/20/25/30/35/40/45/50/55/60/70
Φ4.0mm	12/16/20/25/30/35/40/45/50/55/60/70/80/90
Φ4.5mm	16/20/25/30/35/40/45/50/55/60/70/80/90/100
Φ5mm	20/25/30/35/40/45/50/55/60/70/80/90/100/110/120
Φ6mm	20/25/30/35/40/45/50/55/60/70/80/90/100/110/120/130/140/150/160/180/200/220




Hex Washer Head Self Drilling Screws



Size	DK	K	D	L	S	DW
(#10) 4.8	9.80-10.50	3.80-4.30	4.62-4.80	13-100	7.78-8.00	14mm
(#12) 5.5	10.00-11.00	4.80-5.40	5.28-5.46	19-250	7.78-8.00	16mm
(#14) 6.3	12.20-13.50	5.30-5.90	6.03-6.25	19-250	9.78-10.00	16mm




Hex Washer Head Self Tapping Screws




Size	DK	K	S	D	L
(#10) 4.8	9.80-10.50	3.80-4.30	7.78-8.00	4.62-4.80	13-130
(#12) 5.5	10.00-11.00	4.80-5.40	7.78-8.00	5.28-5.46	19-250
(#14) 6.3	12.20-13.50	5.30-5.90	9.78-10.00	6.03-6.25	19-250


HEAD STYLES



HEAD RECESS




Self Drilling Screws CSK Head Philips



Size	DK	K(max)	P	D	L
(#6) 3.5	6.90-7.30	2.35	1.3	3.35-3.53	9.5-51
(#7) 3.9	7.14-7.50	2.35	1.3	3.73-3.90	9.5-51
(#8) 4.2	8.00-8.40	2.60	1.4	4.04-4.22	13-76
(#10) 4.8	8.90-9.30	2.80	1.6	4.62-4.80	13-120




Self Drilling Screws Wafer Head Philips




Size	A	H	D	L
(#7) 3.9	9.70-10.10	1.90-2.50	3.73-3.90	13-50
(#8) 4.2	10.20-11.10	1.90-2.50	4.04-4.22	13-76
(#10) 4.8	10.20-11.10	1.90-2.50	4.62-4.80	13-76



Self Tapping Screws Wafer Head Philips



Size	A	H	D	L
(#7) 3.9	9.70-10.10	1.90-2.50	3.73-3.90	13-50
(#8) 4.2	10.20-11.10	1.90-2.50	4.04-4.22	13-76
(#10) 4.8	10.20-11.10	1.90-2.50	4.62-4.80	13-76



Galvanized Square Boat Nails

Size	L mm	D mm	Finish
1"XBWG11	25	3.0	E.G./HDG
1.5XBWG10	38	3.4	E.G./HDG
2"XBWG8	50	4.2	E.G./HDG
3"XBWG7	76	4.5	E.G./HDG
4"XBWG6	101	5.2	E.G./HDG
5"XBWG5	127	5.6	E.G./HDG
6"XBWG4	152	6.0	E.G./HDG

**Fine Blue Shoe Tacks
(Three Star Brand Is Available)**




Size	D mm	Finish
3/8"	9.5	Dark Blue With Paraffin Wax
1/2"	12.7	Dark Blue With Paraffin Wax
5/8"	16	Dark Blue With Paraffin Wax
3/4"	19	Dark Blue With Paraffin Wax
1"	25	Dark Blue With Paraffin Wax
1-1/4"	32	Dark Blue With Paraffin Wax



Cupper Nails / Clout Nails, Big Flat Head

Size	L mm	D mm	Shank	Finish
3/4"	19	2.8/3.0	Smooth / Barbed	E.G./HDG
1"	25	2.8/3.0	Smooth / Barbed	E.G./HDG
1-1/4"	32	2.8/3.0	Smooth / Barbed	E.G./HDG
1-1/2"	38	2.8/3.0	Smooth / Barbed	E.G./HDG
2"	50	2.8/3.0	Smooth / Barbed	E.G./HDG



Staples / U Nails

Size	L mm	D mm	Point	Finish
3/4"	19	2.4/2.8/3.0	SKEW / DIAMOND	E.G./HDG
1"	25	2.4/2.8/3.0	SKEW / DIAMOND	E.G./HDG
1-1/4"	32	3.0/3.4/3.8	SKEW / DIAMOND	E.G./HDG
1-1/2"	38	3.0/3.4/3.8/4.2	SKEW / DIAMOND	E.G./HDG
2"	50	3.4/3.8/4.2	SKEW / DIAMOND	E.G./HDG




**Slotted Countersunk Flat Head Wood Screws
(DIN Standard)**

Gauge	L inch	L mm	Finish
3/3.5/4/4.5/5	3/4"	19	POLISHED
3/3.5/4/4.5/5	1"	25	POLISHED
3/3.5/4/4.5/5		30	POLISHED
3.5/4/4.5/5/5.5	1-1/4"	32	POLISHED
3.5/4/4.5/5/5.5		35	POLISHED
4/4.5/5/5.5/6	1-1/2"	38	POLISHED
4/4.5/5/5.5/6		40	POLISHED
4/4.5/5/5.5/6	2"	50	POLISHED



Blind Rivet, Aluminium

Size	L mm	D inch	D mm
1/4"	6.4	1/8",5/32",3/16",1/4"	3.2/4.0/4.76
5/16"	8	1/8",5/32",3/16",1/4"	3.2/4.0/4.76
3/8"	9.5	1/8",5/32",3/16",1/4"	3.2/4.0/4.76/6.4
1/2"	12.7	1/8",5/32",3/16",1/4"	3.2/4.0/4.76/6.4
9/16"	14	1/8",5/32",3/16",1/4"	3.2/4.0/4.76/6.4
5/8"	15.7	1/8",5/32",3/16",1/4"	3.2/4.0/4.76/6.4
3/4"	19	1/8",5/32",3/16",1/4"	3.2/4.0/4.76/6.4
1"	25	1/8",5/32",3/16",1/4"	3.2/4.0/4.76/6.4



Cut Masonry Nails, Blunt point, Tapered Shank

Size	L mm	Finish
1-1/2"	38	POLISHED/E.G./HDG
2"	50	POLISHED/E.G./HDG
2-1/2"	63.5	POLISHED/E.G./HDG
3"	76	POLISHED/E.G./HDG
4"	101	POLISHED/E.G./HDG



Hex Washer Head Self Drilling Screws



Copper Nails



Drywall Screws



Galvanized Roofing Bolt With Washer 1#

Material	D 1 mm	D 2mm	L mm
Q235	5.2	6	200-300
Q235	5.6	6.4	200-300
Q235	5.8	6.6	200-300
Q235	6.4	7.3	200-300




Galvanized Roofing Bolt With Washer 2#

Material	D 1 mm	D 2mm	L mm
Q235	5.2	6	200-300
Q235	5.6	6.4	200-300
Q235	5.8	6.6	200-300
Q235	6.4	7.3	200-300




Galvanized Roofing Bolt With Washer 3#

Material	D 1 mm	D 2mm	L mm
Q235	5.2	6	200-300
Q235	5.6	6.4	200-300
Q235	5.8	6.6	200-300
Q235	6.4	7.3	200-300



Galvanized Roofing Screw With Washer 1#

SIZE mm	D mm	L mm	Material
6.0X60	6	60	Q235
6.0X80	6	80	Q235
8.0X80	8	80	Q235



Galvanized Roofing Screw With Washer 2#

SIZE mm	D mm	L mm	Material
6.0X60	6	60	Q235
6.0X80	6	80	Q235
8.0X80	8	80	Q235



Wire & Wire Mesh



Galvanized Iron Wire

The varieties of products	Hot dipped galvanized wire, electro-galvanized iron wire
The standard size	BWG6-BWG36
T/S (kg/mm ²)	30-45
Package	0.5-800kg/coil,inside plastic film,outside plastic weaving bag or hessian cloth

Black Annealed Wire

The varieties of products	Black annealed iron wire,soft
The standard size	BWG5-BWG39
T/S (kg/mm ²)	30-45
Treating	oil painting,without oil
Package	0.5-800kg/coil,inside plastic film,outside plastic weaving bag or hessian cloth




Razor Wire

Reference Number	Blade Style	Thickness	Wire Dia	Barb Length	Barb Width	Barb spacing
BTO-12		0.5x0.05	2.5x0.1	12x1	15x1	26x1
BTO-18		0.5x0.05	2.5x0.1	18x1	15x1	33x1
BTO-22		0.5x0.05	2.5x0.1	22x1	15x1	34x1
BTO-28		0.5x0.05	2.5	28	15	45x1
BTO-30		0.5x0.05	2.5	30	18	45x1
BTO-60		0.6x0.05	2.5x0.1	60x2	32x1	100x2
BTO-65		0.6x0.05	2.5x0.1	65x2	21x1	100x2



Hexagonal Wire Netting (E.G./H.D.G/PVC)

Aperture(Inch)	Wire gauge	Size(feet)
1"	17#,18#,19#,20#,21#,22#,23#,24#,25#	3' X 100'
1 1/4"	18#,19#,20#,21#,22#	3' X 100'
1 1/2"	17#,18#,19#,20#,21#,22#,23#	3' X 100'
2"	17#,18#,19#,20#,21#,22#,23#	3' X 100'
3"	16#,17#,18#,19#,20#	3' X 100'
1 1/2"	22#,23#,24#,25#,26#	3' X 100'
5/8"	21#,22#,23#,24#,25#	3' X 100'
3/4"	20#,21#,22#,23#,24#,25#	3' X 100'



The width and length can be adjusted as the request of the customers

Welded Wire Mesh

Opening		
In inch	In metric unit(mm)	Wire Diameter<BWG>
1/4" X 1/4"	6.4mm X 6.4mm	22,23,24
3/8" X 3/8"	9.5mm X 9.5mm	19,20,21,22
1/2" X 1/2"	12.7mm X 12.7mm	16,17,18,19,20,21,22,23
5/8" X 5/8"	16mm X 16mm	18,19,20,21
3/4" X 3/4"	19.1mm X 19.1mm	16,17,18,19,20,21
1" X 1/2"	25.4mm X 12.7mm	16,17,18,19,20,21
1" X 1"	25.4mm X 25.4mm	14,15,16,17,18,19
1-1/2" X 1-1/2"	38mm X 38mm	14,15,16,17,18,19
1" X 2"	25.4mm X 50.8mm	12,13,14,15,16
2" X 2"	50.8mm X 50.8mm	12,13,14,15,16



1, Standard roll length: 30m; width: 0.5m to 1.8m
2, Packing: in waterproof paper in rolls. Customer packing available at request

Barbed Wire

Type	Wire Gauge (SWG)	Barb Distance	Barb Length
Electro Galvanized Barbed Wire	10# X 12#	7.5-15cm	1.5-3cm
	12# X 12#		
	12# X 14#		
Hot-dip Galvanized Barbed Wire	14# X 14#	7.5-15cm	1.5-3cm
	14# X 16#		
	16# X 16#		
	16# X 18#		

